

AD-A091 947

DAVID W TAYLOR NAVAL SHIP RESEARCH AND DEVELOPMENT CE--ETC F/G 20/11
RESPONSE OF A POINT EXCITED INFINITELY LONG CYLINDRICAL SHELL I--ETC(U)
NOV 80 W VOGEL, D FEIT
DTNSRDC-80/061

UNCLASSIFIED

NL

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206

AD A091947

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER (14) DTNSRDC-80/061 ✓	2. GOVT ACCESSION NO. AD-A012 947	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) (6) RESPONSE OF A POINT EXCITED INFINITELY LONG CYLINDRICAL SHELL IMMERSSED IN AN ACOUSTIC MEDIUM.	5. TYPE OF REPORT & PERIOD COVERED Formal (16) F43452 ✓	
7. AUTHOR(s) (10) William Vogel and David Feit	6. PERFORMING ORG. REPORT NUMBER ZRO1108	
9. PERFORMING ORGANIZATION NAME AND ADDRESS David W. Taylor Naval Ship Research and Development Center Bethesda, Maryland 20084 ✓	8. CONTRACT OR GRANT NUMBER(s) (11) SF 43452.703, ZRO110801	
11. CONTROLLING OFFICE NAME AND ADDRESS (9) Research and development Repts.	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS (See reverse side)	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) Naval Sea Systems Command (05H) Washington, D. C. 20360	12. REPORT DATE November 1950	
	13. NUMBER OF PAGES 58	
	15. SECURITY CLASS. (of this report) UNCLASSIFIED	
15a. DECLASSIFICATION/DOWNGRADING SCHEDULE		
16. DISTRIBUTION STATEMENT (of this Report) APPROVED FOR PUBLIC RELEASE: DISTRIBUTION UNLIMITED		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Point Driven Cylindrical Shell Response of a Cylinder with Water Loading Bending and Membrane Modes of a Cylindrical Shell Point Driven Infinite Plate		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The velocity distribution of a point excited, infinitely long, thin cylindrical shell immersed in an acoustic medium is considered. The problem is analyzed by applying integral transform techniques; a solution is then obtained by evaluating the inverse transform integrals numerically. Examples are presented to illustrate the effect of fluid loading on the vibrational behavior of a point excited cylindrical shell. In addition, results are compared with those of a point excited plate with and without fluid loading.		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE
S/N 0102-LF-014-6601

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

387682 slt

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

(Block 10)

Program Element 62543N

Task Area SF43452702

Work Units 1960-010 and 1960-020

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

TABLE OF CONTENTS

	Page
LIST OF FIGURES.	iv
ABSTRACT	1
ADMINISTRATIVE INFORMATION	1
INTRODUCTION	1
FORMULATION OF PROBLEM	3
DESCRIPTION OF PROBLEM.	3
SHELL EQUATIONS OF MOTION	3
FOURIER TRANSFORM METHOD OF SOLUTION.	5
PRESSURE DUE TO FLUID MEDIUM.	7
DETERMINATION OF CYLINDER'S RADIAL RESPONSE	10
RADIATED PRESSURE FIELD	12
METHOD OF SOLUTION	13
DISCUSSION OF RESULTS.	14
MODAL RESPONSE OF CYLINDRICAL SHELL	14
RESPONSE OF A POINT EXCITED CYLINDER.	17
SUMMARY.	24
APPENDIX A	27
APPENDIX B	29
REFERENCES	53

Accession For.	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A	

LIST OF FIGURES

	Page
1 - Geometry of Cylindrical Shell Showing Direction of Displacements.	31
2 - Admittance of the Circumferential $n=0$ Mode for a Cylindrical Shell in Vacuo	32
3 - Admittance of the Circumferential $n=0$ Mode for a Cylindrical Immersed in Water and a Plate with Water on One Side	33
4 - Admittance of a Cylindrical Shell Immersed in Water and in a Vacuum for Circumferential Mode 6	34
5 - Admittance of a Cylindrical Shell Immersed in Water for Circumferential Mode 41.	35
6 - Response of the Various Modes of Vibration for a Cylindrical Shell Immersed in Water and Excited at a Frequency Corresponding to the Forty First Circumferential Mode.	36
7 - Drive Point Velocity of a Cylindrical Shell and a Plate as a Function of Frequency	37
8 - Drive Point Velocity of a Cylindrical Shell in Vacuo at Low Frequencies.	38
9 - Comparison of the Velocity Responses for a Cylinder and Plate in Vacuo, Point Excited at the Ring Frequency.	39
10 - Comparison of the Velocity Responses for a Cylinder and Plate in Water, Point Excited at the Ring Frequency.	40
11 - Normalized Velocity Profile along the Circumference of a Cylinder in Vacuo Point Driven at the Ring Frequency	41
12 - Modal Response at the Drive Point for a Cylindrical Shell in Vacuo Excited at the Ring Frequency	42
13 - Normalized Velocity Profile along the Circumference of a Cylinder Immersed in Water Point Driven at the Ring Frequency.	43

	Page
14 - Modal Response at the Drive Point for a Cylindrical Shell in Water Excited at the Ring Frequency.	44
15 - Comparison of the Velocity Responses for a Cylinder and Plate in Vacuo, Point Excited at Frequencies of $\alpha=0.5$ and $\alpha=1.5$	45
16 - Comparison of the Velocity Responses for a Cylinder and Plate in Water, Point Excited at Frequencies of $\alpha=0.5$ and $\alpha=1.5$	46
17 - Velocity Profile Along the Circumference of a Point Excited Cylinder Compared to the Velocity Profile for a Point Excited Plate	47
18 - Normalized Velocity Profile Along the Circumference of a Cylindrical Shell in Vacuo Point Driven at a Frequency of $\alpha=0.5$	48
19 - Normalized Velocity Profile Along the Circum- ference of a Cylindrical Shell with a Structural Damping Value of 0.01 and Point Driven at the Ring Frequency in Vacuo.	49
20 - Envelope of the Minima and Maxima Response of a Cylindrical Shell in Vacuo as a Function of the Circumferential Coordinate ϕ	50
21 - Drive Point Velocity of a Cylindrical Shell and a Plate in Vacuo	51

ABSTRACT

The velocity distribution of a point excited, infinitely long, thin cylindrical shell immersed in an acoustic medium is considered. The problem is analyzed by applying integral transform techniques; a solution is then obtained by evaluating the inverse transform integrals numerically. Examples are presented to illustrate the effect of fluid loading on the vibrational behavior of a point excited cylindrical shell. In addition, results are compared with those of a point excited plate with and without fluid loading.

ADMINISTRATIVE INFORMATION

The investigation presented in this report was initiated under the Independent Research Program, Program Element 61152N, Task Area ZR0110801, Work Unit 1960-011 and completed under funding from the Naval Sea Systems Command (05H) under Task Area SF43452702, Task 18185, Work Units 1960-010 and 1960-020.

INTRODUCTION

Understanding the vibration and radiation characteristics of a cylindrical shell is of considerable importance to the Navy. It can provide insight into the reasonableness of simplifying approximations currently utilized, for instance, determining the frequency range in which a complex structure can be modeled as a flat plate. Unfortunately, the analysis of a fluid loaded cylinder is complicated by the fact that there are three components of displacement which are coupled to each other. This differs from a flat plate where only one component of structural displacement is considered.

Determining a solution to the shell equations for an infinite cylinder is further complicated when fluid loading is included. However, the response of an infinite cylindrical shell with or without fluid loading can be determined, in theory, by applying integral transform techniques. The difficulty with this method is that complicated inverse transforms must be evaluated. Past studies have circumvented this difficulty by several approaches. One is to consider the exciting force specification to be independent of the coordinate defining the axial direction of the cylinder, which leads to a plane or two dimensional problem.^{1*} Other investigators have simplified the problem by assuming an exciting force which is a periodic function having a specified axial wave length.^{2,3} However, once a longitudinal wave length is specified, then only one longitudinal wave length is permitted for the response of the infinite cylinder. But in reality, all wave lengths are permissible for a point driven infinitely long cylindrical shell. Another configuration which avoids solving the inverse transform integrals is that of a cylindrical shell with periodic stiffeners which reduces the integral to a summation.⁴ In any event, utilizing any of the above simplifying procedures negates to a varying degree the usefulness of the solution to the actual physical problem. On the other hand, with the use of large computers and refined numerical techniques, it is now possible to determine the response of a point excited fluid loaded cylinder or its radiated pressure directly, thus avoiding the above inhibiting assumptions.

*A complete listing of references is given on page 53.

FORMULATION OF PROBLEM

DESCRIPTION OF PROBLEM

The problem considered here consists of an infinitely long cylindrical shell with a radius "a" much larger than the shell wall thickness h. The cylinder is surrounded by an infinite fluid medium with a fluid density ρ and sound speed c. The cylinder is excited by a temporally varying point force $Fe^{-i\omega t}$ where F is the amplitude of the force and ω is the circular frequency of excitation. It will be assumed that the cylinder is in steady state vibration and therefore a time dependence of the form $e^{-i\omega t}$ for all dependent variables is assumed throughout the analysis.

The cylinder is defined by an r, ϕ , and z coordinate system where the r axis is directed outward along the normal to the shell's surface, ϕ defines the angle in the circumferential direction and z defines the longitudinal axis as shown in Figure 1. The above orthogonal displacements of the shell's middle surface are denoted by w, v and u, the radial, tangential, and longitudinal (or axial), respectively.

SHELL EQUATIONS OF MOTION

For a thin cylindrical shell the equations of motion are

$$\frac{\partial^2 u}{\partial z^2} + \frac{1-\nu}{2a^2} \frac{\partial^2 u}{\partial \phi^2} + \frac{1+\nu}{2a} \frac{\partial^2 v}{\partial z \partial \phi} + \frac{\nu}{a} \frac{\partial w}{\partial z} - \frac{\ddot{u}}{c_p^2} = 0 \quad (1a)$$

$$\frac{1+\nu}{2a} \frac{\partial^2 u}{\partial z \partial \phi} + \frac{1-\nu}{2} \frac{\partial^2 v}{\partial z^2} + \frac{1}{a^2} \frac{\partial^2 v}{\partial \phi^2} + \frac{1}{a^2} \frac{\partial w}{\partial \phi} - \frac{\ddot{v}}{c_p^2} = 0 \quad (1b)$$

$$\frac{\nu}{a} \frac{\partial u}{\partial z} + \frac{1}{a^2} \frac{\partial v}{\partial \phi} + \frac{w}{a^2} + \beta^2 \left(a^2 \frac{\partial^4 w}{\partial z^4} + 2 \frac{\partial^4 w}{\partial z^2 \partial \phi^2} + \frac{1}{a^2} \frac{\partial^4 w}{\partial \phi^4} \right) + \frac{\ddot{w}}{c_p^2} - \frac{p_a(1-\nu^2)}{Eh} = 0 \quad (1c)$$

where $c_p = \sqrt{\frac{E}{\rho_s(1-\nu^2)}}$, the compressional wave velocity in an elastic plate

E = Young's modulus

ν = Poisson's ratio

ρ_s = mass density of shell material

$\beta = \frac{h}{\sqrt{12} a}$

h = shell wall thickness

p_a = total pressure acting on shell

a = radius of cylindrical shell

The total pressure acting on the shell can be expressed as

$$p_a = \frac{F\delta(z)\delta(\phi)e^{-i\omega t}}{a} - p(a, \phi, z, t) \quad (2)$$

where

$$p(a, \phi, z, t) = p_0(a, \phi, z)e^{-i\omega t}$$

$\delta(\phi)$ = delta function with argument ϕ

The first term on right hand side of Equation (2) is due to the harmonically varying point force whereas the second term is due to the fluid pressure acting on the shell surface.

The motion of the shell can be described by assuming displacements of the form

$$u(\phi, z, t) = \sum_{n=0}^{\infty} \cos n\phi U_n(z) e^{-i\omega t} \quad (3a)$$

$$v(\phi, z, t) = \sum_{n=0}^{\infty} \sin n\phi V_n(z) e^{-i\omega t} \quad (3b)$$

$$w(\phi, z, t) = \sum_{n=0}^{\infty} \cos n\phi W_n(z) e^{-i\omega t} \quad (3c)$$

FOURIER TRANSFORM METHOD OF SOLUTION

Solutions to problems of the type considered here, that is, systems described by independent variables extending over an infinite domain, are greatly facilitated by employing integral transform techniques. The Fourier transform pair which will be used in this analysis is defined

$$F(k) = \int_{-\infty}^{+\infty} e^{-ikz} f(z) dz \quad (4)$$

which transforms the $f(z)$ into the wave number domain, and the inverse transform,

$$f(z) = \frac{1}{2\pi} \int_{-\infty}^{+\infty} e^{ikz} F(k) dk \quad (5)$$

which transforms the function $F(k)$ back into the spatial domain.

Substituting Equation (3) into Equation (1) and transforming the result into the wave number domain yields

$$\left[k^2 a^2 + \frac{(1-\nu)}{2} n^2 - \Omega^2 \right] U_n(k) - i k a n \frac{(1+\nu)}{2} V_n(k) - i k a \nu W_n(k) = 0 \quad (6a)$$

$$i k a n \frac{(1+\nu)}{2} U_n(k) + \left[k^2 a^2 \frac{(1-\nu)}{2} + n^2 - \Omega^2 \right] V_n(k) + n W_n(k) = 0 \quad (6b)$$

$$\begin{aligned} i k a \nu U_n(k) + n V_n(k) + \left[\beta^2 (k^2 a^2 + n^2)^2 + 1 - \Omega^2 \right] W_n(k) \\ = \int_0^{2\pi} \frac{\epsilon_n}{2\pi} a^2 \frac{(1-\nu^2)}{Eh} \left[\frac{F\delta(\phi)}{a} - P(a, \phi; k) \right] \cos n\phi d\phi \end{aligned} \quad (6c)$$

where $\Omega = \frac{\omega a}{c_p}$ is a nondimensionalized frequency parameter.

The above equations were obtained by utilizing the orthogonality conditions

$$\frac{\epsilon_n}{2\pi} \int_0^{2\pi} \cos m\phi \cos n\phi d\phi = \delta_{mn} \quad (7a)$$

$$\frac{1}{\pi} \int_0^{2\pi} \sin m\phi \sin n\phi d\phi = \delta_{mn} \quad (7b)$$

where

$$\delta_{nm} = \begin{cases} 1 & n=m \\ 0 & n \neq m \end{cases} \quad \text{and} \quad \epsilon_n = \begin{cases} 1 & n=0 \\ 2 & n \geq 1 \end{cases}$$

The term $F\delta(\phi)$ on the right hand side of Equation (6c) due to the exciting force can be expanded in terms of a Fourier series, i.e.

$$F\delta(\phi) = \sum_{n=0}^{\infty} F_n \cos n\phi \quad (8)$$

Multiplying both sides by $\cos m\phi d\phi$ and integrating between 0 and 2π yields

$$F_n = \frac{\epsilon_n}{2\pi} \int_0^{2\pi} F\delta(\phi) \cos m\phi d\phi = \frac{\epsilon_n}{2\pi} F \quad (9)$$

Consequently, from Equations (8) and (9)

$$F\delta(\phi) = \sum_{n=0}^{\infty} \frac{F\epsilon_n}{2\pi} \cos n\phi \quad (10)$$

PRESSURE DUE TO FLUID MEDIUM

The term $P(a, \phi, k)$ in Equation (6c) is the Fourier transform of the pressure acting on the shell due to the presence of the fluid medium. This term can be related to the radial motion of the shell by utilizing the wave equation governing the fluid medium and the appropriate boundary condition at the fluid-shell interface. The wave equation in cylindrical coordinates is

$$\nabla^2 p(r, \phi, z, t) - \frac{1}{c^2} \frac{\partial^2 p(r, \phi, z, t)}{\partial t^2} = 0 \quad (11)$$

where

$$\nabla^2 = \frac{\partial^2}{\partial r^2} + \frac{1}{r} \frac{\partial}{\partial r} + \frac{1}{r^2} \frac{\partial^2}{\partial \phi^2} + \frac{\partial^2}{\partial z^2}$$

$$p(r, \phi, z, t) = p_0(r, \phi, z) e^{-i\omega t}$$

Suppressing the harmonic time dependence the wave equation can be written as

$$\nabla^2 p_o(r, \phi, z) + k_o^2 p_o(r, \phi, z) = 0 \quad (12)$$

where $k_o = \frac{\omega}{c}$ is the wave number of the acoustic medium.

To determine the transformed pressure $P_o(a, \phi; k)$ the z domain in the wave equation is transformed into the wave number domain.

$$\left(\frac{\partial^2}{\partial r^2} + \frac{1}{r} \frac{\partial}{\partial r} + \frac{1}{r^2} \frac{\partial^2}{\partial \phi^2} + k_o^2 - k^2 \right) p_o(r, \phi; k) = 0 \quad (13)$$

Since the fluid medium is infinite in extent, there are only waves propagating outward from the cylinder. Therefore, the solution to the above differential equation is the Hankel Function of the first kind; thus

$$P_o(r, \phi; k) = \sum_{n=0}^{\infty} A_n H_n \left[(k_o^2 - k^2)^{1/2} r \right] \cos n\phi \quad (14)$$

The constant A_n can be determined from the boundary condition at the fluid-shell interface where continuity requires the shell and fluid particle velocity to be equal, i.e.,

$$\frac{\partial w}{\partial t}(\phi, z, t) = v_f(r, \phi, z, t) \Big|_{r=a} \quad (15)$$

The fluid particle velocity v_f is related to the fluid pressure by the momentum balance relation

$$\frac{\partial p}{\partial r}(r, \phi, z, t) = -\rho \frac{\partial v_f}{\partial t}(r, \phi, z, t) \quad (16)$$

Combining Equations (15) and (16) while suppressing the harmonic time dependence we have

$$\left. \frac{\partial p_o}{\partial r}(r, \phi, z) \right|_{r=a} = -i\rho\omega \dot{w}_o(\phi, z) = \rho\omega^2 w_o(\phi, z) \quad (17)$$

where

$$w(\phi, z, t) = w_o(\phi, z)e^{-i\omega t}$$

In the wave number domain the above equation can be expressed as

$$\frac{\partial p_o}{\partial r}(r, \phi; k) = \rho\omega^2 w_o(\phi; k) \quad (18)$$

where

$$w_o(\phi; k) = \sum_{n=0}^{\infty} \cos n\phi W_n(k)$$

Combining Equations (14) and (18) and solving for A_n one obtains

$$A_n = \frac{\rho\omega^2 W_n(k)}{H'_n \left[(k_o^2 - k^2)^{1/2} a \right] \left[k_o^2 - k^2 \right]^{1/2}}$$

Consequently,

$$P_o(r, \phi; k) = \sum_{n=0}^{\infty} Z_{nr}(k) \dot{W}_n(k) \cos n\phi \quad (19a)$$

where

$$Z_{nr}(k) = \frac{i\rho c k_o H_n \left[(k_o^2 - k^2)^{1/2} r \right]}{(k_o^2 - k^2)^{1/2} H'_n \left[(k_o^2 - k^2)^{1/2} a \right]} \quad (19b)$$

is the transform of the fluid impedance. The transform of the fluid pressure, $p(a, \phi, z)$ acting on the shell surface is obtained by setting $r=a$.

Thus

$$P_o(a, \phi; k) = \sum_{n=0}^{\infty} Z_{na}(k) \dot{W}_n(k) \cos n\phi \quad (20a)$$

where

$$Z_{na}(k) = \frac{i\rho c k_o H_n \left[(k_o^2 - k^2)^{1/2} a \right]}{(k_o^2 - k^2)^{1/2} \left[H'_n (k_o^2 - k^2)^{1/2} a \right]} \quad (20b)$$

DETERMINATION OF CYLINDER'S RADIAL RESPONSE

Substituting the transformed expressions for the exciting force and fluid pressure acting on the cylinder into Equation (6c) yields

$$\begin{aligned} & -ika v U_n(k) + n V_n(k) + \left[\beta^2 (k_a^2 + n^2)^2 + 1 - \Omega^2 - a^2 \frac{(1-v^2)}{Eh} i\omega Z_{na}(k) \right] W_n(k) \\ & = \frac{a(1-v^2)\epsilon_n F}{2\pi Eh} \end{aligned} \quad (21)$$

The radial component $W_n(k)$ can now be determined from Equations (6a), (6b) and (21) by applying Cramer's rule, i.e.,

$$W_n(k) = \frac{\epsilon_n F}{-i\omega 2\pi a [Z_{np}(k) + Z_{nm}(k) + Z_{na}(k)]} \quad (22a)$$

where

$$Z_{np}(k) = \frac{i c_p \rho_s h}{\Omega a} \left[\beta^2 (a^2 k^2 + n^2)^2 + 1 - \Omega^2 \right] \quad (22b)$$

$$Z_{nm}(k) = \frac{i c_p \rho_s h}{\Omega a} \left\{ \frac{k^2 a^2 v [n^2(1+v) + v(\Omega^2 - k^2 a^2(1-v)/2 - n^2)]}{DEN} + \frac{n^2 [\Omega^2 - (1-v)n/2 - k^2 a^2]}{DEN} \right\}$$

$$DEN = \left[\Omega^2 - \frac{(1-v)n^2}{2} - a^2 k^2 \right] \left[\Omega^2 - a^2 k^2 \frac{(1-v)}{2} - n^2 \right] - k^2 a^2 n^2 \frac{(1+v)^2}{4} \quad (22c)$$

$Z_{np} + Z_{nm}$ describes the impedance of the entire cylindrical shell. Note that Z_{np} approaches the impedance of a plate as Ω approaches ∞ . On the other hand, Z_{nm} , the impedance due to the membrane terms of the cylindrical shell, approaches zero when $\Omega \gg 1$.

By applying the inverse Fourier transform,

$$W_n(z) = \frac{1}{2\pi} \int_{-\infty}^{+\infty} W_n(k) e^{ikz} dk \quad (23)$$

to Equation (19) and substituting the result into Equation (3c), the radial velocity of the cylinder can be expressed as

$$\dot{w}(\phi, z, t) = \frac{F}{(2\pi)^2 a} \sum_{n=0}^{\infty} \epsilon_n \cos n\phi e^{-i\omega t} \int_{-\infty}^{+\infty} G_n(k) dk \quad (24a)$$

where

$$G_n(k) = \frac{e^{ikz} dk}{Z_{np}(k) + Z_{nm}(k) + Z_{na}(k)} \quad (24b)$$

Similar expressions can be obtained for the displacements u and v .

RADIATED PRESSURE FIELD

The radiated pressure field can now be expressed as

$$p(r, \phi, z, t) = \frac{F}{(2\pi)^2 a} \sum_{n=0}^{\infty} \epsilon_n \cos n\phi e^{-i\omega t} \int_{-\infty}^{+\infty} Z_{nr}(k) G_n(k) dk \quad (25)$$

where $Z_{nr}(k)$ and $G_n(k)$ are defined by Equations (19b) and (24b), respectively.

Referring to the expressions for Z_{nr} (or Z_{na}) it can be seen that for $k_0 > k$, Z_{nr} has both a real (resistive) and imaginary (reactive) part. Thus for $k_0 > k$ energy will be radiated into the acoustic medium. On the other hand, when $k > k_0$ the arguments of Z_{nr} become imaginary and the Hankel function can be replaced by the modified Hankel function with a real argument, namely,

$$H_n(ix) = \frac{2}{\pi} i^{-(n+1)} K_n(x) \quad (26)$$

Therefore for $k > k_o$

$$Z_{nr}(k) = \frac{\rho c k K_n \left[(k^2 - k_o^2)^{1/2} r \right]}{(k^2 - k_o^2)^{1/2} K'_n \left[(k^2 - k_o^2)^{1/2} a \right]} \quad (27)$$

which is purely a reactive and mass-like impedance. Thus for $k > k_o$ no energy will be radiated.

METHOD OF SOLUTION

The integral in Equation (24a) may be referred to as a modal influence function which relates the response of the cylinder at a point z due to a force applied in this case at $z=0$ for a particular mode n . Similarly the integral in Equation (25) relates the radiated pressure to the force for a particular mode n . The total response or radiated pressure is then obtained by summing the modal functions for all the circumferential modes.

There is no known closed form solution to the above integrals. The integrands are transcendental functions further complicated by the presence of poles and branch points in the complex k plane. The integrand is not analytic for all values of k in the complex k plane. The technique employed to evaluate the modal functions is similar to the one developed for evaluating the Green's function for a line driven, fluid loaded infinite plate. This method involves numerically evaluating the inverse Fourier transform integrals along the real axis after structural damping has been introduced into the integrand. Structural damping is introduced by replacing Young's modulus E by $E(1-i\eta)$ and is necessary to move the singularities off the real axis. η is the loss factor for the shell material. Briefly, the numerical scheme is based on using variable integration increments along

the path of integration. The size of the increment is automatically adjusted so as to keep the incremental change of the integrand values within prescribed limits. In essence, the second derivative of the function controls the mesh size. Thus where the integrand is not well behaved near a singularity the mesh size is very fine. On the band where the integrand is well behaved the mesh size is much larger. This method produces a set containing a minimum number of integration points which accurately describes the function to be integrated in a very smooth and continuous fashion. Once the set of points has been generated, the integral is evaluated by using Simpson's rule.

DISCUSSION OF RESULTS

The results presented in this report are for a shell thickness to radius ratio of $h/a=.01$. Response calculations were performed for both the in vacuo and water loaded cases. In order to put the results into perspective, they are compared with those of an equivalently loaded plate. This is particularly important, since an analysis of this type for a point excited cylindrical shell has apparently never been previously published.

MODAL RESPONSE OF CYLINDRICAL SHELL

The total response of a cylinder is a summation over all its modal responses. In practice, however, only a finite number of modes have to be summed. The number of modes to be summed depends primarily on the excitation frequency and the degree of accuracy desired. Consequently, it is informative to see how individual circumferential modes vary as a function of frequency and also the relative contribution of the various modes when the cylinder is excited at a particular frequency.

The results presented in this section all have been normalized to an equivalent line loaded plate. The drive point velocity of a line loaded infinite plate in vacuo has an exact solution of the form

$$G_p(\omega) = \frac{F'k_p}{4\omega m} (1+i\eta)^{1/4} (1+i) \approx \frac{F'k_p}{4\omega m} (1+i\eta/4)(1+i) \quad (28)$$

The normalizing factor is $F'k_p/4\omega m$ where $F' = F/2\pi a$ has the units of force per unit length and F is the point force acting on the cylinder.

In Figure 2, the real and imaginary components of the admittance in vacuo for the $n=0$ circumferential mode are shown as a function of the frequency parameter α . The frequency parameter α is often used for plates and is equal to k_o/k_p where k_o is the acoustic wave number of the acoustic medium and k_p is the plate wave number. Also, α is equal to $(\omega/\omega_c)^{1/2}$ where ω_c is the coincident frequency of the plate. In terms of the non-dimensionalized frequency parameter Ω , $\alpha = (c_p/c)(\Omega\beta)^{1/2}$.

Referring to Figure 2 the maximum response as a function of frequency, a resonance, for the $n=0$ occurs at the ring frequency of the cylindrical shell. That is when the compressional structureborne wave length in the shell material equals the circumference of the cylinder. In vacuo the ring frequency is given by $f_o = c_p/2\pi a$. Above the ring frequency, the admittance converges rapidly to the admittance of a line excited plate which has a normalized value of $.975 + i1.025$ with a loss factor of $.1$. For $n=0$ the tangential component of motion for the shell is zero.

In Figure 3, the real and imaginary components of the admittance of the $n=0$ mode and a line excited plate are compared with water loading included. As in the in vacuo case, the cylindrical shell admittance differs considerably from that of a line driven plate in the vicinity of the ring

frequency of the cylinder. However, the amplitude at resonance is much lower with fluid loading than the corresponding in vacuo case. This is due to the fact that at the ring frequency the structural wave length is larger than the acoustic wave length in the fluid and consequently the $n=0$ mode of a cylinder is a very efficient radiator at this frequency and is strongly damped by radiation.

In addition, the presence of the fluid lowers the nondimensionalized frequency of the $n=0$ mode from $\Omega=1$ for the in vacuo case to $\Omega \approx .77$ with fluid loading. Junger and Feit have obtained an expression for approximating the natural frequency of the $n=0$ mode of a submerged cylindrical shell.⁵ The approximation is

$$\Omega = \left[1 + \left(\frac{\rho}{\rho_s k_p h} \right) \right]^{-1/2}$$

It is reassuring to note that the above expression predicts that the reduced ring frequency of the $n=0$ mode in water to be $\Omega \approx .77$.

In Figure 4 the admittance corresponding to circumferential mode number 6 is shown as a function of frequency with and without water loading. Unlike the $n=0$ circumferential mode there are now two resonant frequencies. As a matter of fact for each $n>1$ there are always two resonant frequencies present in the radial response. The lower resonant frequency is primarily an inextensional type mode where as the higher resonant frequency is primarily an extensional or membrane type mode.

In Figure 5 the drive point response of the forty first circumferential mode is illustrated as a function of frequency with water loading included. Again there are two resonant frequencies. However, unlike the case for low

values of n , there is very little radial motion due to extentional or membrane strains at the higher resonant frequency. This difference can be explained by energy considerations.⁶ Arnold and Warburton have shown that at low circumferential wave numbers n/a , the strain energy associated with bending is low compared to the strain energy due to stretching of the reference surface. On the other hand, at higher circumferential wave numbers the bending strain energy is high whereas the stretching strain energy is low.

Since the response of the cylinder depends upon all the circumferential modes of vibration, it is of interest to see how each individual mode contributes to the total response when the cylinder is excited at a particular frequency. Figure 6 demonstrates the relative contribution of the various modes when the cylinder is driven at a frequency near the resonance frequency corresponding approximately to the forty first bending mode. As can be expected, the modes in the vicinity of the resonant bending mode contribute substantially more to the radial response than do modes farther away. The radial response of the cylinder at this exciting frequency would be primarily due to circumferential bending rather than stretching of the reference surface. It can also be shown that for values of n somewhat larger than the predominantly excited modes, the admittance decreases at the rate of $1/n^3$ (see Appendix B). Thus it is relatively easy to minimize truncation errors when calculating the drive point admittance.

RESPONSE OF A POINT EXCITED CYLINDER

As previously pointed out the response of a point excited cylinder should converge at higher frequencies to that for a point excited plate. Thus, for convenience, the results in this section are normalized to the

admittance of a point driven plate in vacuo (see Appendix A). In vacuo, the velocity of a point excited plate at radius r can be expressed as

$$v_v(r) = \frac{F}{2\pi} \int_0^{+\infty} \frac{k J_0(rk) dk}{Z_p(k)} \quad (29)$$

and with fluid loading, the velocity is

$$v_f(r) = \frac{F}{2\pi} \int_0^{+\infty} \frac{k J_0(rk) dk}{Z_p(k) + Z_a(k)} \quad (30)$$

where J_0 = cylindrical Bessel function of zero order

$Z_p(k)$ = is the transform of the plate surface impedance operator

$Z_a(k)$ = is the transform of the fluid impedance

r = distance from the applied force

It can be shown that the admittance or drive point velocity ($r=0$) of the plate in vacuo is independent of frequency and can be expressed as

$$v_v(0) = \frac{\sqrt{3}}{4} \frac{F}{\rho_s c_p h^2} \quad (31)$$

The above term is used to normalize all results presented in this section. The velocity response away from the drive point for the in vacuo and fluid loading cases are obtained by numerically integrating Equations (29) and (30), respectively, by a method similar to the one outlined for a cylinder. In the case of fluid loading the admittance must also be obtained numerically.

In Figure 7 the normalized admittance for a point excited cylinder is shown with and without water loading as a function of the frequency parameter α . These results are compared with the admittance of a point

driven plate. Since the admittance of a plate in vacuo is independent of frequency, its normalized value is therefore a constant equal to one. As should be expected, the greatest difference between a plate and cylindrical shell occurs in the vicinity of the ring frequency and at lower frequencies. However, it is surprising how quickly the admittance of the cylinder converges to a plate for both the in vacuo and fluid loaded cases. Nevertheless, the frequency at which the admittance of a point driven cylinder approaches that of a plate depends on the parameter h/a . For values of h/a larger than used here, the frequency would be higher. On the other hand, for smaller values of h/a the convergence frequency would be lower.

The peaks in the admittance curves occur at frequencies corresponding to the ring frequency of the cylinder. The response at this frequency is dominated by the $n=0$ mode. At lower frequencies, i.e., low values of α , the admittance curves for the cylinder are shown as smooth functions of α for convenience only. To further explain this, let us assume that the response of the cylinder has no z dependence; then the natural frequencies of the circumferential bending modes in vacuo are given by

$$f_n \approx \frac{c_p}{2\pi} \frac{\beta n}{a} \frac{(n^2+1)}{(n^2-1)^{1/2}} \quad (32)$$

The above relation can also be used to approximate exciting frequencies which are half way between any two adjacent circumferential bending modes of the cylinder. Figure 8 illustrates the effect on the velocity response when the exciting frequency coincides with the frequency of a resonant bending mode ($n=\text{integer}$) and when it does not (for instance when $n=\text{integer} + .5$). As can be seen from the figure there is an oscillation

in the response at lower frequencies. However, as the frequency increases, the disparity becomes less and less until the response curve becomes smooth regardless of the exciting frequency. This is because the circumferential bending waves are dispersive and their wave lengths become smaller as the exciting frequency increases. Consequently, at higher frequencies the waves damp out more quickly, thus eliminating any reinforcement or cancellation which would tend to occur at lower frequencies. It should be pointed out, however, that the rate at which the envelope closes depends on the damping value.

Figures 9 and 10 demonstrate the differences in the velocity profile away from the drive point between a plate and cylinder when excited at the ring frequency of a cylinder without and with water loading, respectively. For the cylinder the velocity profile is along the z axis and the distance from the drive point is expressed in nondimensionalized form as z/a . Figures 9 and 10 show considerable differences in the velocity profiles between a point driven plate and cylinder, particularly for the in vacuo case. This should be expected since, at the ring frequency, the radial motion of the cylinder is primarily due to extensional strains of the shell's middle surface. However, water loading does moderate the differences in the velocity profile between a point driven plate and a cylinder. In any event, as the admittance of a point driven plate and cylinder approach each other at higher frequencies, one would also expect their respective velocity profiles in the vicinity of the drive point to become increasingly similar. The degree of similarity will depend not only on the exciting frequency but also on the amount of damping, for it is the damping value which determines how quickly the propagating waves from the drive

point decay and therefore how localized the vibration pattern becomes. The more localized the vibration pattern is, the less is the effect the shell curvature has upon the vibration response.

Figure 11 illustrates the resulting velocity profile in vacuo around the circumference of the cylinder when the excitation frequency coincides with the ring frequency of the cylinder. At the ring frequency, the response of the cylinder is a combination of the predominantly excited bending modes superimposed upon the predominantly excited membrane modes. Figure 12 illustrates the contribution of the various modes to the total drive point response at the ring frequency. The resonant peak that occurs at the lower mode numbers is due to the resonant membrane modes as well as the rigid body mode ($n=1$). On the other hand, the second peak is due to a resonant bending mode. The dominant resonant bending mode has an n value of 18. This mode has a structural wavelength that corresponds to an angle of 20 degrees along the circumference of the cylinder. As a result, the lobes in the response occur at approximately 20° intervals. If fluid loading is included (Figure 13), the response at the ring frequency is not only substantially reduced but the lobes rapidly disappear away from the drive point. This can be attributed to the fact that in fluid the excited membrane modes of the cylinder are critically damped due to radiation. To further illustrate this, the contribution of each mode to the total drive point response with fluid loading is shown in Figure 14. A comparison with the in vacuo case, Figure 12, clearly demonstrates that the presence of the fluid greatly reduces the amplitude of the resonant peak due to the resonant membrane modes and the rigid body mode. This reduction takes place because these modes are efficient radiators and therefore lose energy through radiation damping.

Figures 15 and 16 compare the velocity response of a cylinder and plate away from the drive point along the generator without and with water loading, respectively, at an exciting frequency corresponding to $\alpha=.5$. As the two figures indicate, at $\alpha=.5$ the response of a plate and cylinder are identical at least for the range of z/a where calculations were performed. Thus, for the values of h/a and damping used here, the vibration response of a cylinder can, for all practical purposes, be accurately represented by a flat plate in the vicinity of $\alpha=.5$.

Figures 15 and 16 also illustrate the velocity response of a point driven plate excited at a frequency of $\alpha=1.5$ with and without water loading, respectively. In view of the results for $\alpha=.5$, the velocity response of a point driven cylinder should be and in fact is identical to a point driven plate for $\alpha=1.5$.

So far only the velocity response along the z axis of the cylinder has been compared with that of a point driven plate of equivalent radius r . Indeed, if at some frequency a cylinder can be approximated by a plate, the velocity response along the circumference of a cylinder away from the drive point should also be similar to a point driven plate. In Figure 17 such a comparison is made between a point driven cylinder and plate with $\alpha=.5$. From Figure 17 it is obvious that the two responses are indeed very similar for the range of z/a considered and for a damping value of .1.

Figure 18 demonstrates how localized the velocity pattern near the drive point becomes with $\alpha=.5$. In Figure 18 a 10^0 increment corresponds to a z/a increment of approximately .175 in Figure 17.

All the previous results have been arrived at by assuming a damping factor .1. Although a damping factor of .1 may be a reasonable value

for many structures, it may be too high for others. Consequently, in order to demonstrate the effect of structural damping on the vibration response of a cylinder, calculations were also performed using a very small damping value of .01. In Figure 18 the velocity envelope around the circumference of a cylinder is shown when the excitation frequency corresponds to the ring frequency in vacuo. A comparison between Figures 11 and 19 demonstrates how the velocity envelope becomes more complicated when the damping value is changed from .1 to .01. This is due to the fact that structural waves generated at the drive point do not damp out as rapidly and thus travel around the circumference of the cylinder in opposite directions with larger amplitudes. Consequently when the two waves meet, they either reinforce or interfere with each other depending on the observation point on the circumference of the cylinder. As previously pointed out, the predominantly excited bending mode at the ring frequency in vacuo is $n=18$ and therefore has a structural wavelength corresponding to 20 degrees along the circumferences of the cylinder. Therefore, in the vicinity of $\phi=180^\circ$ where the two traveling waves have nearly the same magnitude, the velocity envelope has a periodic wave pattern but with a wavelength of 10° along the circumference due to the interaction of the two waves traveling in opposite directions around the cylinder. Closer to the drive point the velocity profile becomes more complicated because of the greater contribution of the membrane modes to the total response. Figure 19 also shows the actual traveling wave pattern at a time "T" when the drive point response is at its maximum amplitude.

At frequencies above the ring frequency where the membrane modes have little or no effect upon the response, the velocity profile is less

complicated for a damping value of .01. This fact is illustrated in Figure 20 where the cylindrical shell in vacuo is point driven at a frequency corresponding to $\alpha=.5$. For convenience, the maxima and minimum points of the velocity response are represented by an envelope as a function of the circumferential coordinate ϕ .

As the observation point moves further away from the drive point the envelope widens. The maximum width of the envelope would occur at $\phi=180$ where the two traveling waves are of equal magnitude. However, closer to the drive point the standing wave pattern of the velocity envelope is less apparent since the response is primarily caused by the wave traveling the least distance from the drive point. For comparison purposes the response of a point excited plate with a structural damping value of .01 would tend to predict an average value for the cylinder's response in Figure 20.

Away from the drive point along the generator of the cylinder, interference of the waves traversing the cylinder also occurs. However, the effect of this interference on the response of the cylinder is always less than for a case where the waves circumscribe the cylinder at the drive point. This is because along the generator away from the drive point, the waves must follow a helical path to the observation point. The distance of the length of the helical path is always larger than $2\pi a$, the circumference of the cylinder. Consequently, due to damping, the effect of interference at the observation point is diminished.

SUMMARY

In this report an analysis has been presented for calculating the vibration response of a point excited, infinitely long, thin cylindrical shell immersed in an acoustic medium. Using the Fourier transform approach

and refined numerical techniques it was possible to obtain a direct solution without the inhibiting assumptions or approximations used in many previous studies. In order to verify the analysis to the best possible extent, results were compared with those of a fluid loaded, point excited plate at higher frequencies. The vibration response of the point driven plate was obtained by employing a numerical technique similar to the one used to obtain a solution for the cylinder.

Example calculations were performed for a cylinder with a wall thickness to radius ratio of .01. A comparison between the results for a point excited cylinder and plate has given additional insight into the frequency regions where a cylinder can be reasonably approximated by a plate (and where it cannot be). It was found, not unexpectedly, that the greatest difference between the responses of a point excited plate and cylinder occurs at low frequencies and also in the vicinity of the ring frequency of the cylinder where membrane type modes dominate. However, it was surprising how quickly the two responses approach each other above the ring frequency but well below the critical frequency of the plate ($\alpha \approx 1.0$). Consequently for the example presented, that is with an h/a ratio of .01, the response of a point excited cylinder can be approximated with reasonable accuracy by the response of a point excited plate in the mid frequency range ($\alpha \approx .5$) as well as at higher frequencies (of evaluation). It is very advantageous whenever the response of a cylinder can be approximated by a plate since the analysis of a plate is much easier and cheaper than for a cylinder.

Although the radiated pressure in the near field for the cylinder was not calculated, it can be done using Equation (25). The numerical method used to evaluate the pressure integrals would be identical to the one

developed to evaluate the response integrals. It would be interesting to compare the radiated pressure field of a point excited cylinder and plate, particularly in the frequency region where the membrane or extentional strains in the cylinder are of significance.

APPENDIX A

NORMALIZED RESPONSE OF A POINT EXCITED CYLINDRICAL SHELL

The results presented in this report have been normalized in two different ways. First of all, when investigating the behavior of individual circumferential modes, the response was normalized to the admittance of a line excited plate in vacuo. On the other hand, the total response, which contains all the circumferential modes of vibration, was normalized to the admittance of a point excited plate in vacuo.

NORMALIZING TO A POINT EXCITED PLATE

The expression, Equation (21a), for the response of a point excited cylindrical shell can be written in the follow form

$$\dot{w}(\phi, z, t) = \frac{F}{\rho_s c_p (2\pi a)^2} \sum_{n=0}^{\infty} \epsilon_n \cos n\phi e^{-i\omega t} \int_{-\infty}^{+\infty} \frac{e^{i\bar{k}(z/a)} d\bar{k}}{Z_{ns}(\bar{k}) + Z_{na}(\bar{k})} \quad (A1)$$

where $\bar{k} = ka$ (Nondimensionalized wave number)

$$\bar{Z}_{ns} = \frac{Z_{ns}}{\rho_s c_p} \quad (\text{Nondimensionalized shell impedance})$$

$$Z_{na} = \frac{Z_{na}}{\rho_s c_p} \quad (\text{Nondimensionalized acoustic impedance})$$

The drive point velocity of a point excited plate in vacuo is

$$v_v(0) = \frac{\sqrt{3}}{4} \frac{F}{\rho_s c_p h^2} \quad (A2)$$

Dividing Equation (A1) by Equation (A2) the normalized cylinder response may be expressed as

$$\dot{\bar{w}}(\phi, z, t) = \frac{1}{\sqrt{3} \pi^2} \left(\frac{h}{a}\right)^2 \sum_{n=0}^{\infty} \epsilon_n \cos n\phi e^{-i\omega t} \int_{-\infty}^{+\infty} \frac{e^{i\bar{k}(z/a)} d\bar{k}}{Z_{ns}(\bar{k}) + Z_{na}(\bar{k})} \quad (A3)$$

NORMALIZING TO A LINE EXCITED PLATE

The drive point velocity of a line excited plate in vacuo without damping has an exact solution of the form

$$v_p(0) = \frac{F' k_p}{4\omega \rho_s h} (1 + i) \quad (A4)$$

If Equation (A1) is divided through by $\frac{F' k_p}{4\omega \rho h}$, the normalized admittance of the nth mode for a point excited cylinder is given by

$$\dot{\bar{w}}_n(0,0,t) = \frac{2}{\pi} \left(\frac{h}{a}\right) (\Omega \beta)^{1/2} \epsilon_n e^{-i\omega t} \int_{-\infty}^{+\infty} \frac{d\bar{k}}{Z_{ns}(\bar{k}) + Z_{na}(\bar{k})} \quad (A5)$$

where $F' = \frac{F}{2\pi a}$

Similarly, the normalized admittance for a line excited plate in vacuo is

$$\bar{v}_p(0) = 1 + i \quad (A6)$$

APPENDIX B

HIGH FREQUENCY APPROXIMATION FOR A POINT EXCITED INFINITELY LONG CYLINDER IN VACUO

Heckl has obtained a high frequency approximation for the admittance of a point excited thin cylindrical shell in vacuo.⁷ For a particular circumferential mode Heckl's expression is given by

$$\frac{1}{z_n} = \frac{1}{4\beta c_p \rho_s h} \left[\left(n^2 - \frac{\Omega}{\beta} \right)^{-1/2} - \left(n^2 + \frac{\Omega}{\beta} \right)^{1/2} \right] \quad (B1)$$

The above equation is presumably valid in the frequency region where $\Omega \gg 1$. The admittance or drive point velocity of the shell can be expressed as

$$w(z=0, \phi=0) = \left(\frac{1}{\pi a} \right) \sum_{n=0}^{\infty} \frac{1}{z_n} \quad (B2)$$

In Figure 21 the high frequency approximation is compared with the admittance previously obtained for a point excited cylinder and plate. It is evident that Heckl's high frequency approximation converges to a point excited plate and is an excellent approximation to a cylinder in the frequency range of $\alpha \geq .5$ for a h/a ratio of .01. It is also interesting to note that for $\alpha = .5$, $\Omega = .7$ which indicates the above approximation is valid for frequencies much lower than originally assumed. However, it is apparent that Heckl's approximation neglects the membrane modes of the cylinder.

In the expression for admittance, Equation (B1), if $n^2 \gg \frac{\Omega}{\beta}$ it can be shown that

$$\frac{1}{z_n} = \frac{1\Omega}{4\beta^2 c_p \rho_s h n^3} \quad (B3)$$

Thus for large n , $\frac{1}{z_n}$ is inversely proportional to n^3 . This fact can be used to minimize truncation errors when calculating the admittance.

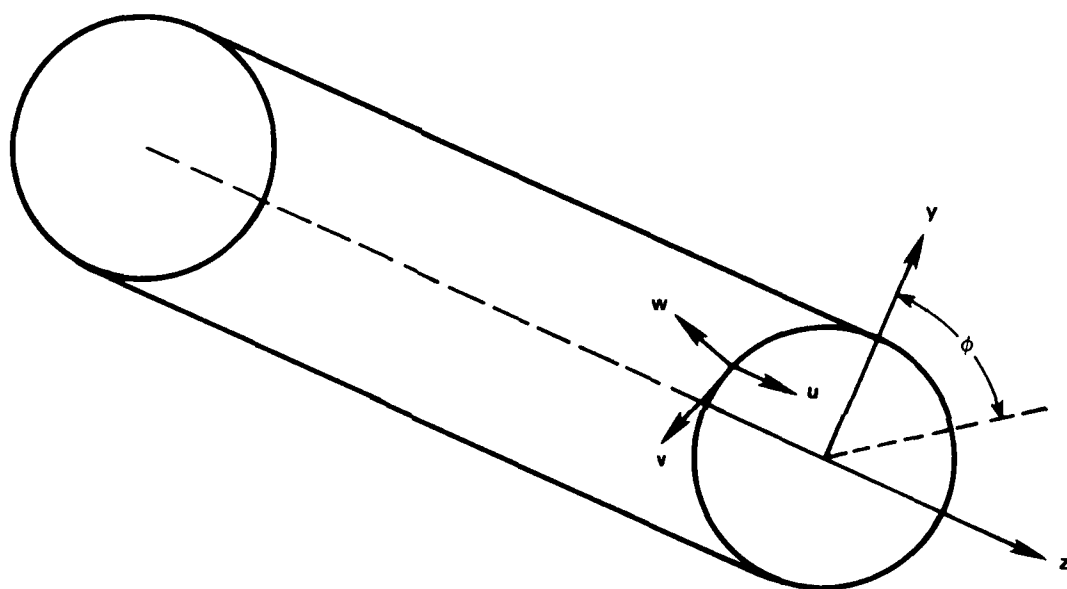


Figure 1 - Geometry of Cylindrical Shell
Showing Direction of Displacements

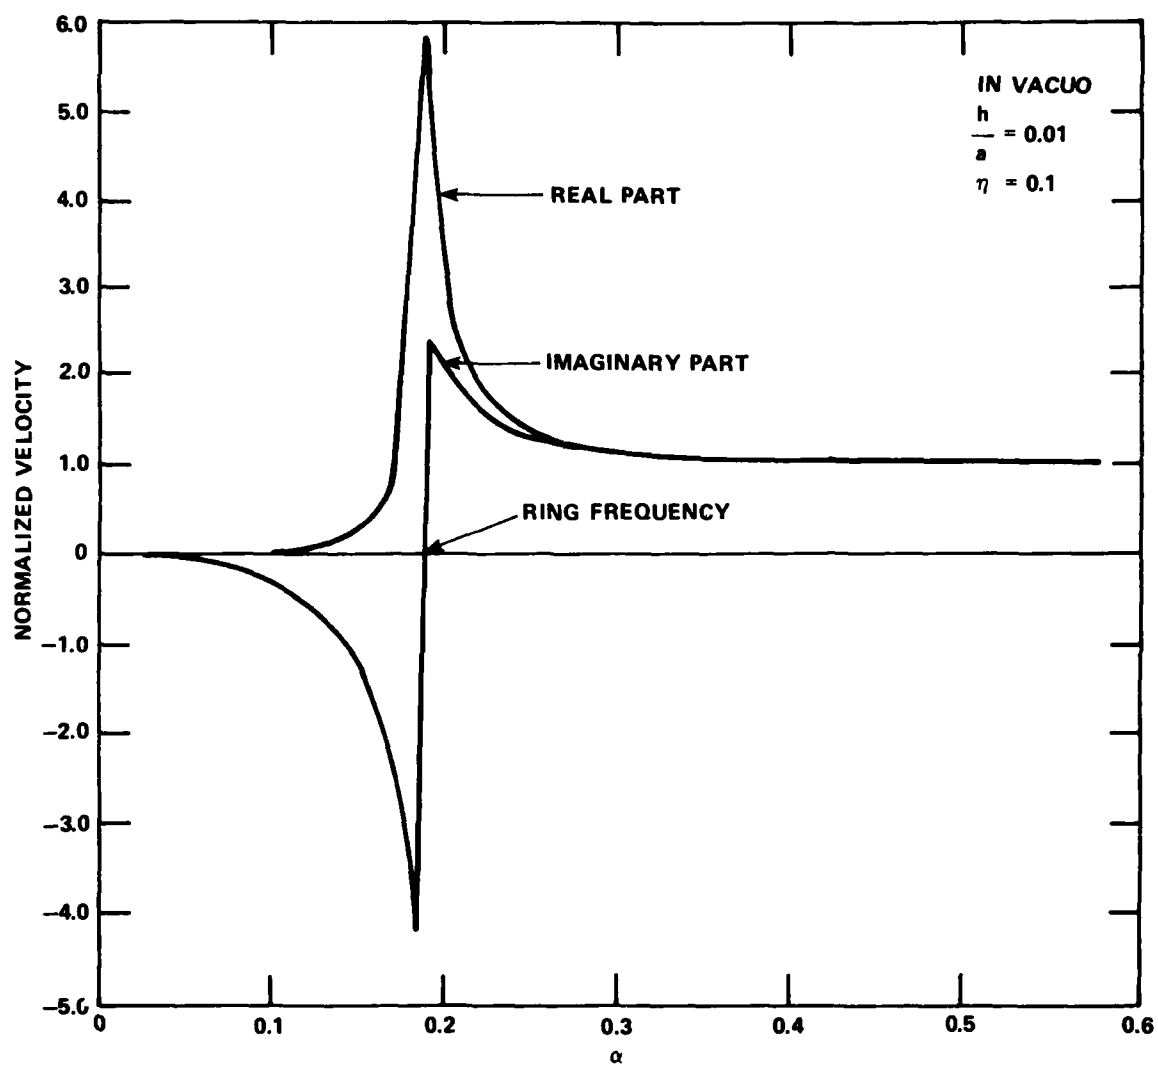


Figure 2 - Admittance of the Circumferential $n=0$ Mode
 for a Cylindrical Shell in Vacuo

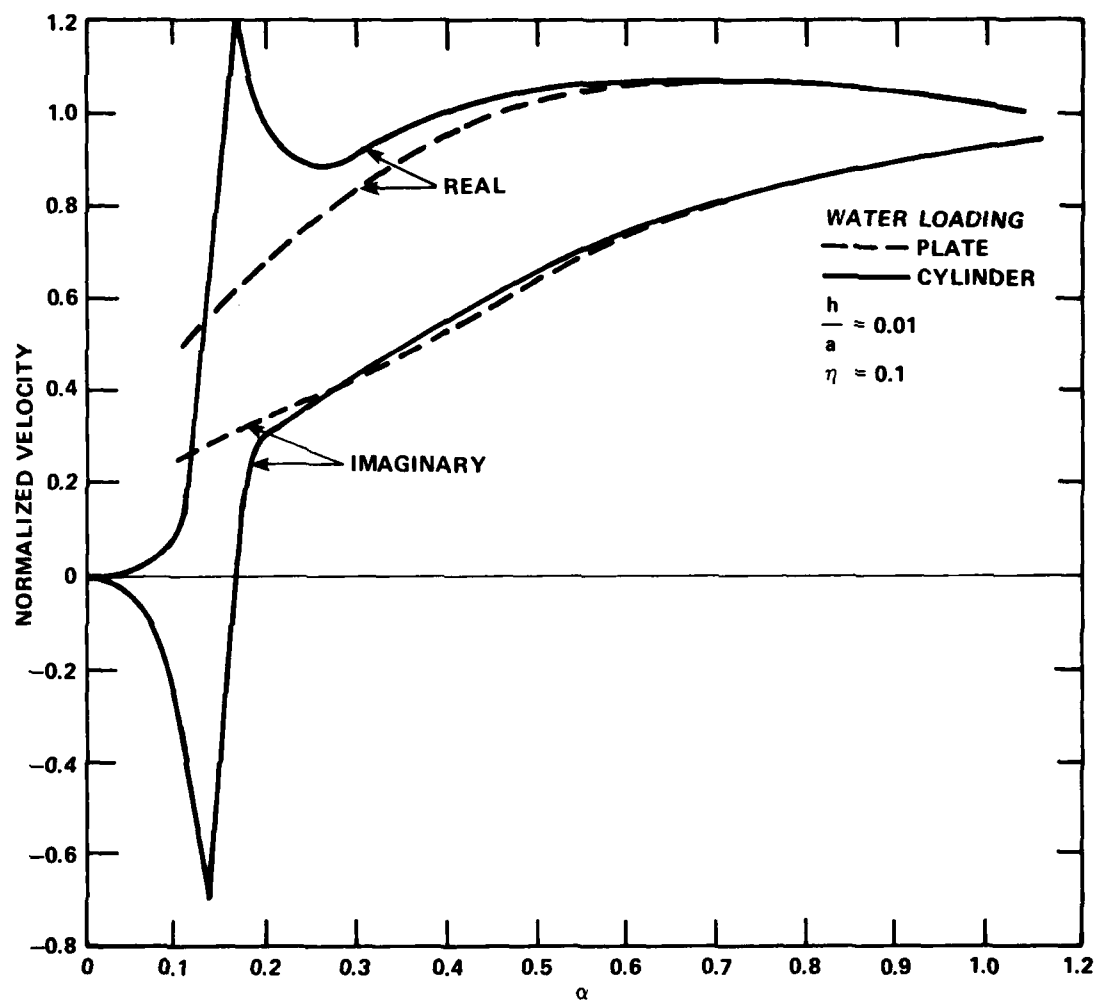


Figure 3 - Admittance of the Circumferential $n=0$ Mode for a Cylindrical Immersed in Water and a Plate with Water on One Side

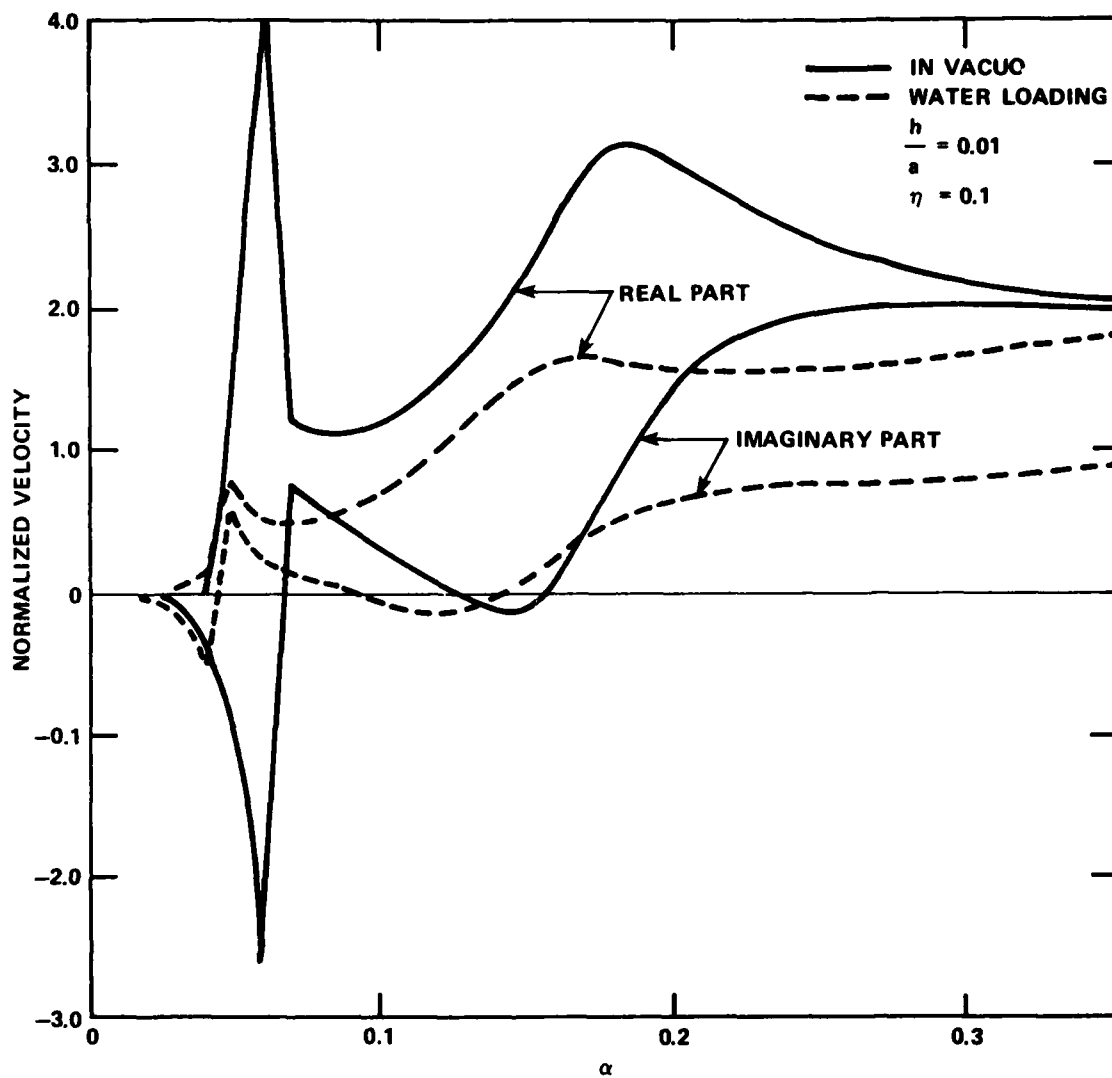


Figure 4 - Admittance of a Cylindrical Shell Immersed in Water and in a Vacuum for Circumferential Mode 6

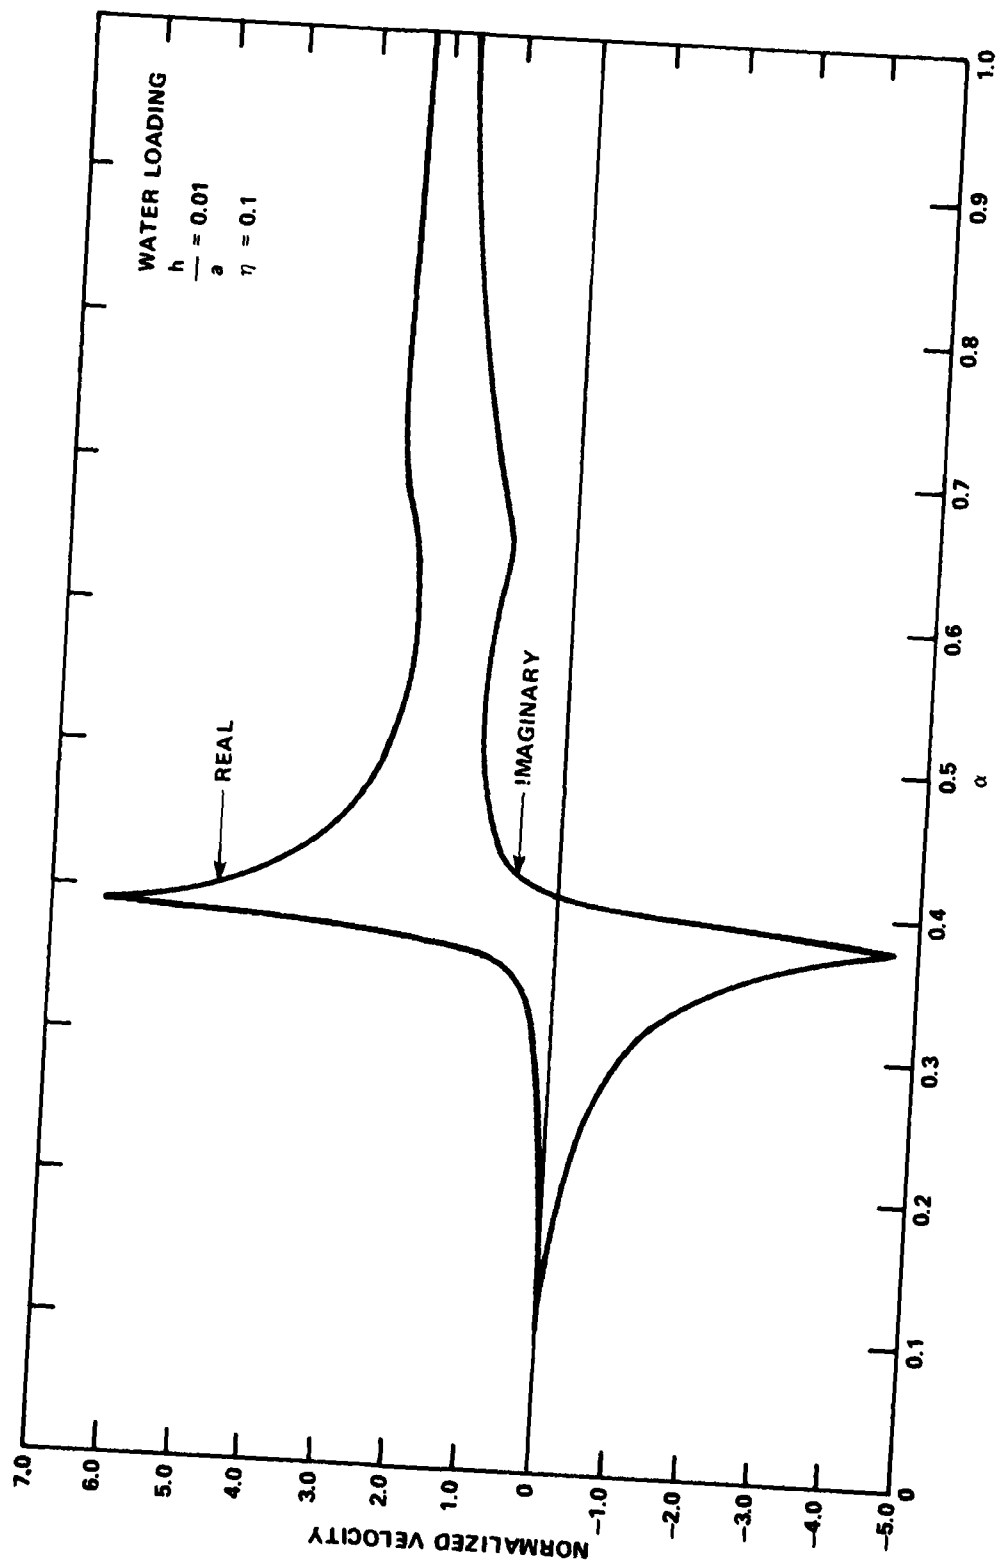


Figure 5 - Admittance of a Cylindrical Shell Immersed in Water for Circumferential Mode 41

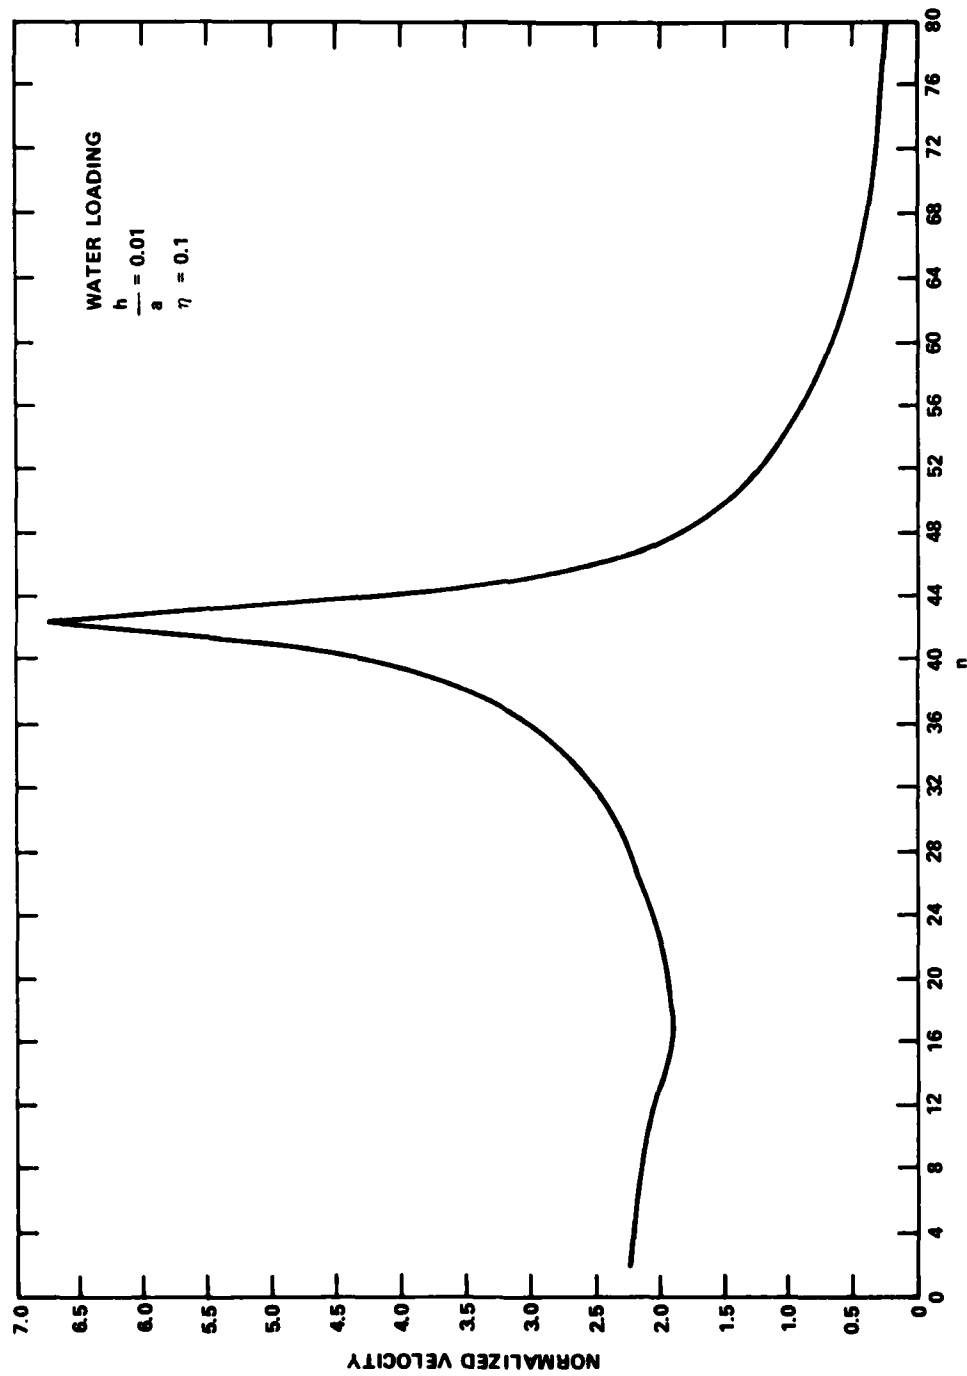


Figure 6 - Response of the Various Modes of Vibration for a Cylindrical Shell Immersed in Water and Excited at a Frequency Corresponding to the Forty First Circumferential Mode

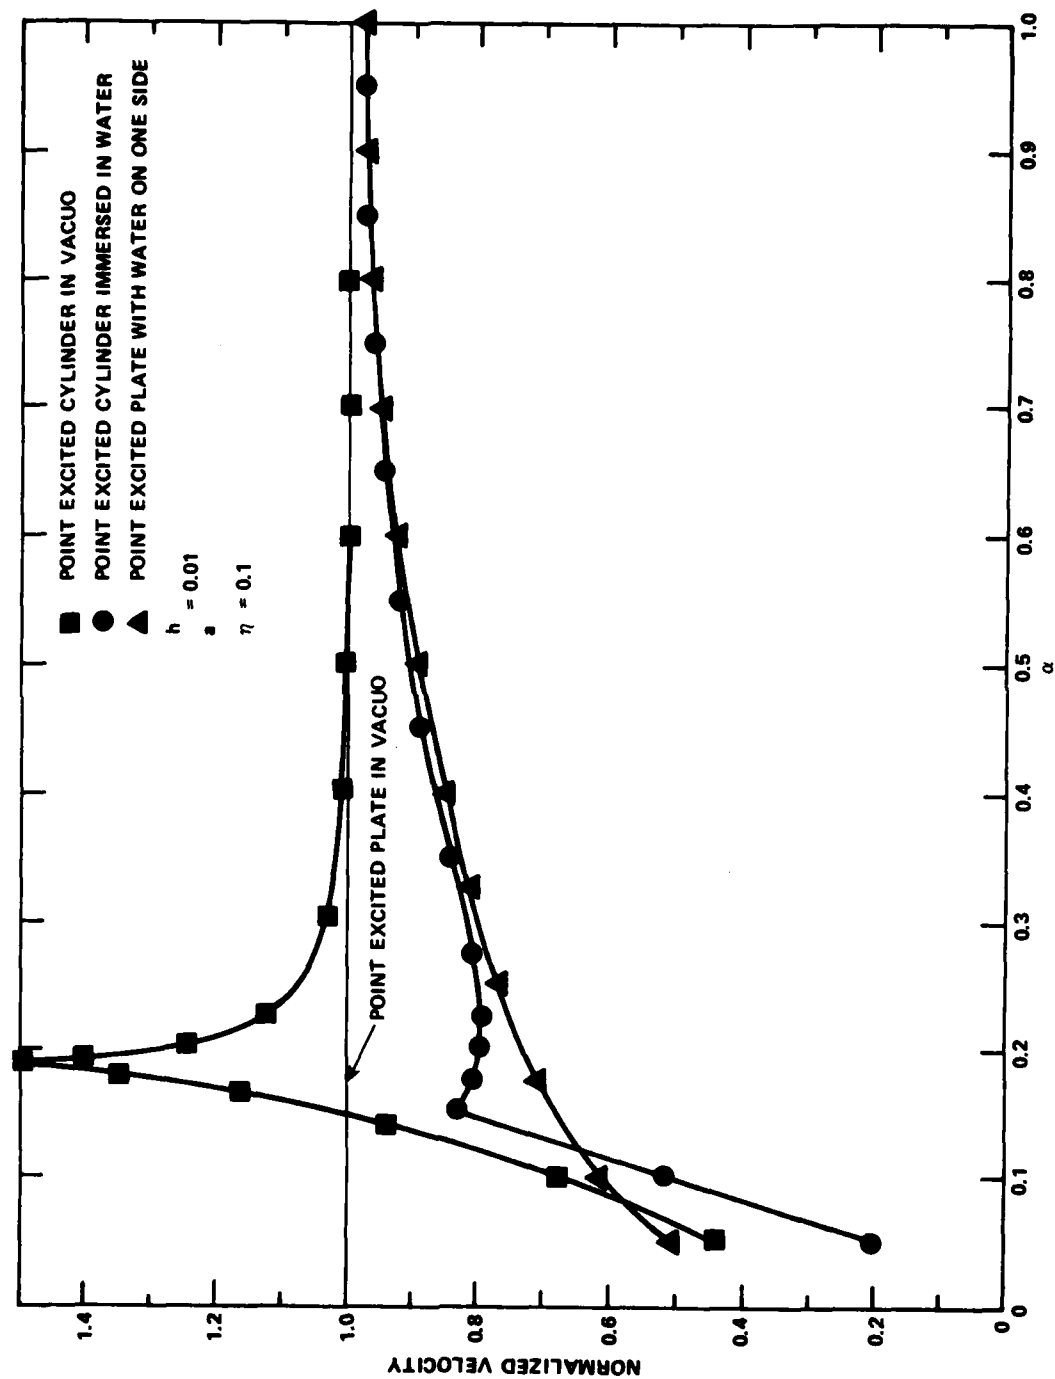


Figure 7 - Drive Point Velocity of a Cylindrical Shell and a Plate as a Function of Frequency

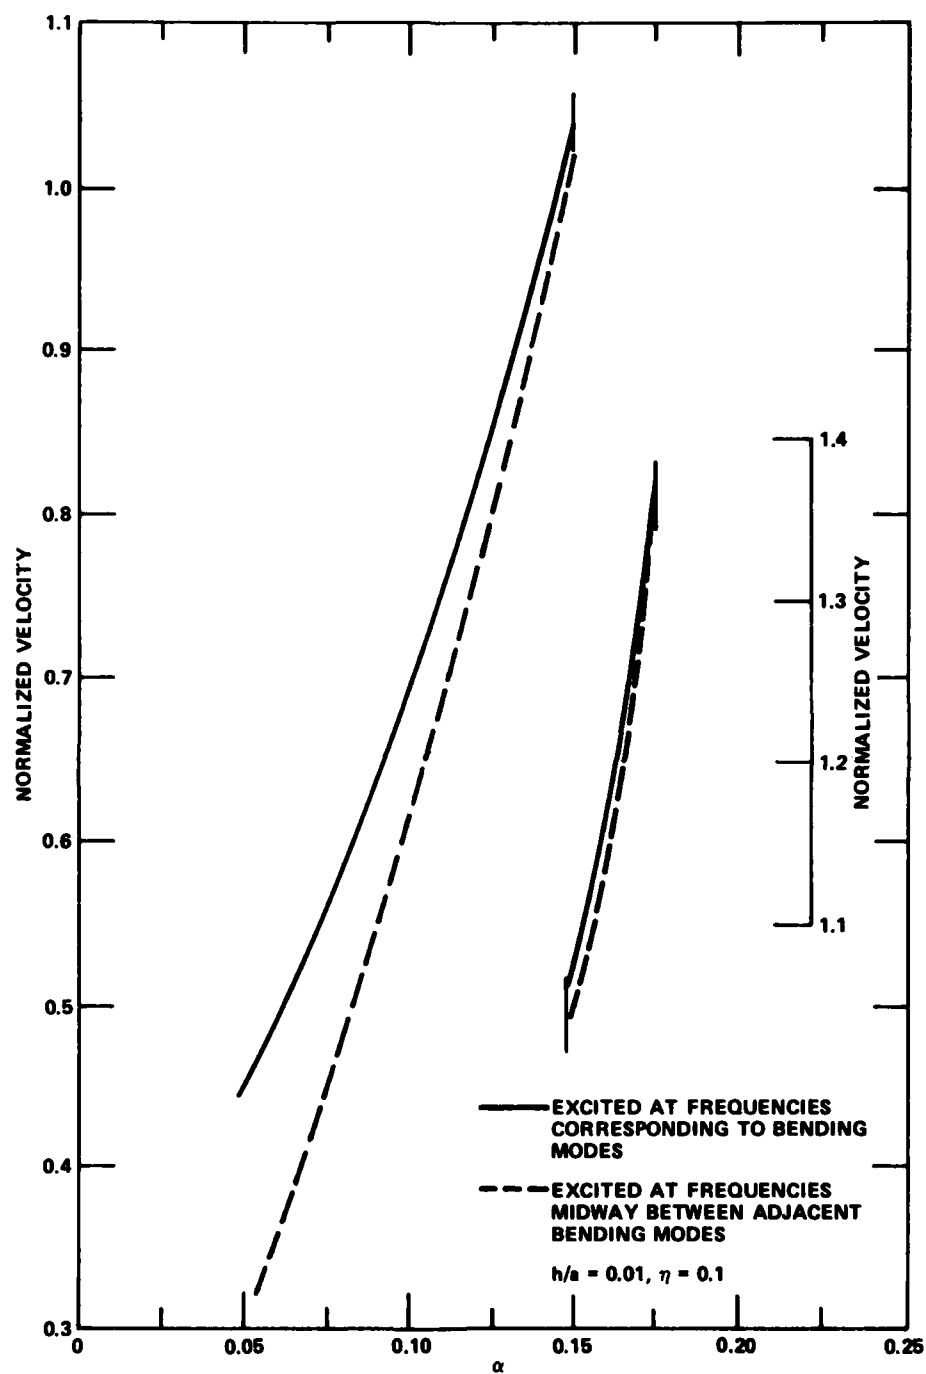


Figure 8 - Drive Point Velocity of a Cylindrical Shell in Vacuo at Low Frequencies

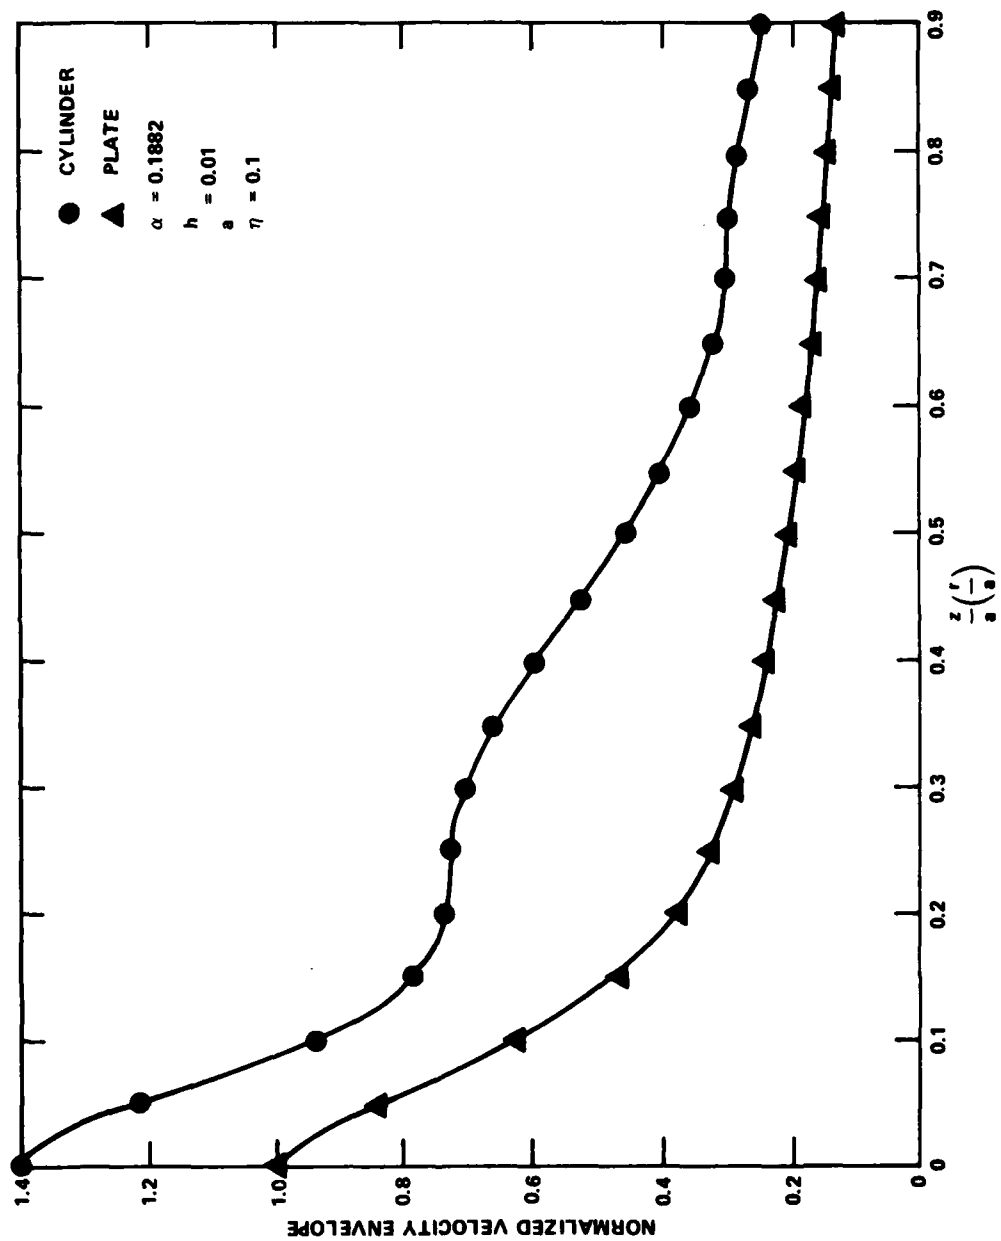


Figure 9 - Comparison of the Velocity Responses for a Cylinder and Plate in Vacuo, Point Excited at the Ring Frequency

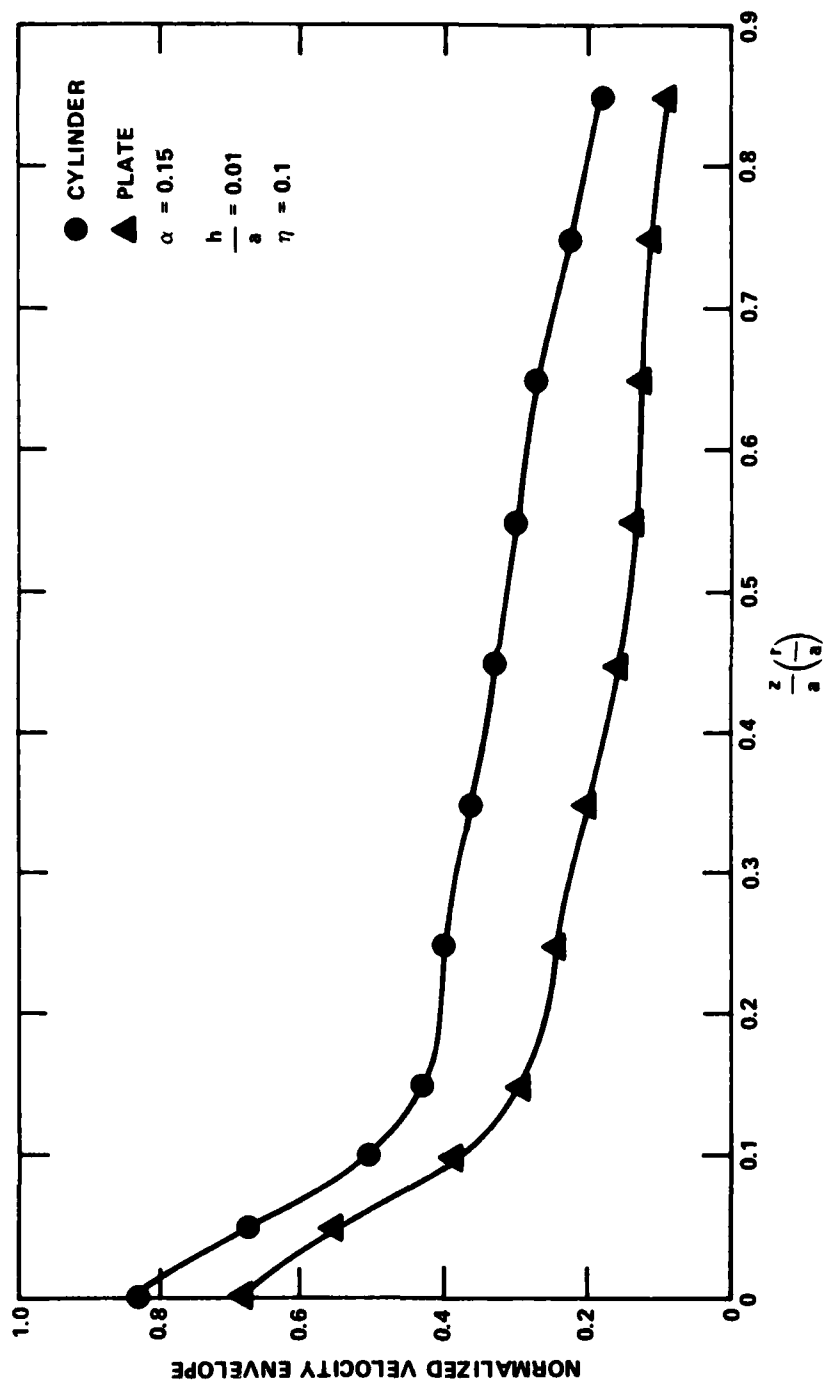


Figure 10 - Comparison of the Velocity Responses for a Cylinder and Plate in Water, Point
Excited at the Ring Frequency

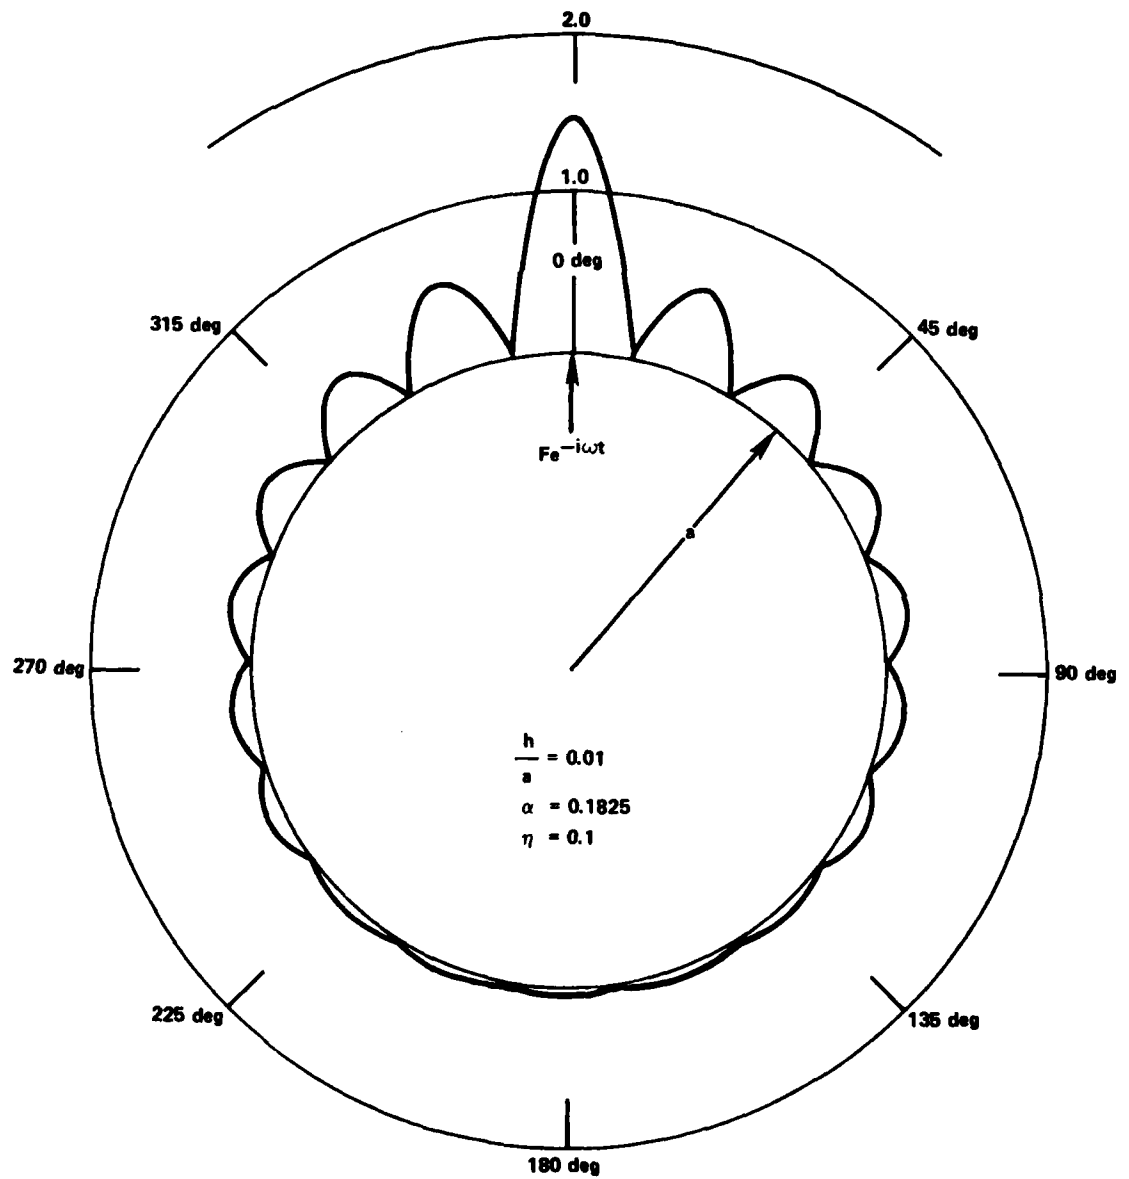


Figure 11 - Normalized Velocity Profile Along the Circumference of a Cylinder in Vacuo Point Driven at the Ring Frequency

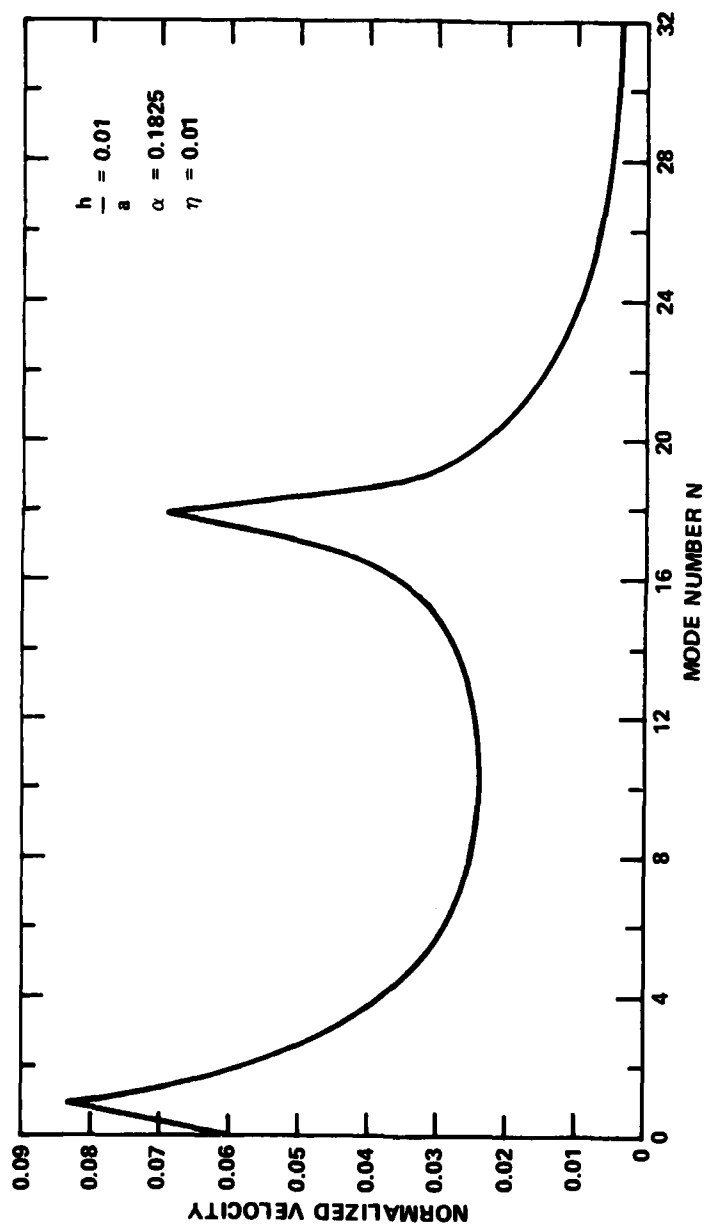


Figure 12 - Modal Response at the Drive Point for a Cylindrical Shell in Vacuo Excited at the Ring Frequency

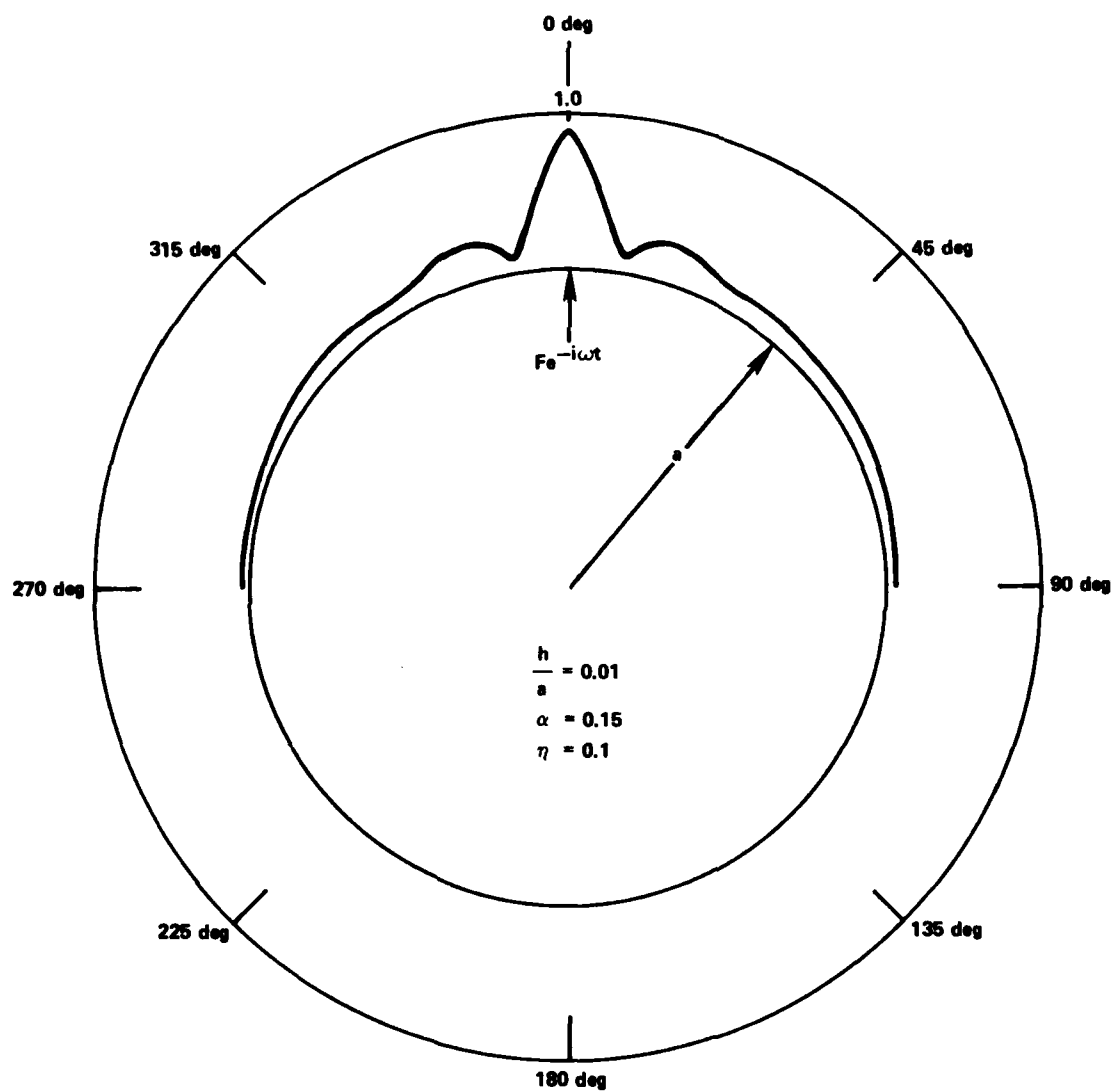


Figure 13 - Normalized Velocity Profile Along the Circumference of a Cylinder Immersed in Water Point Driven at the Ring Frequency

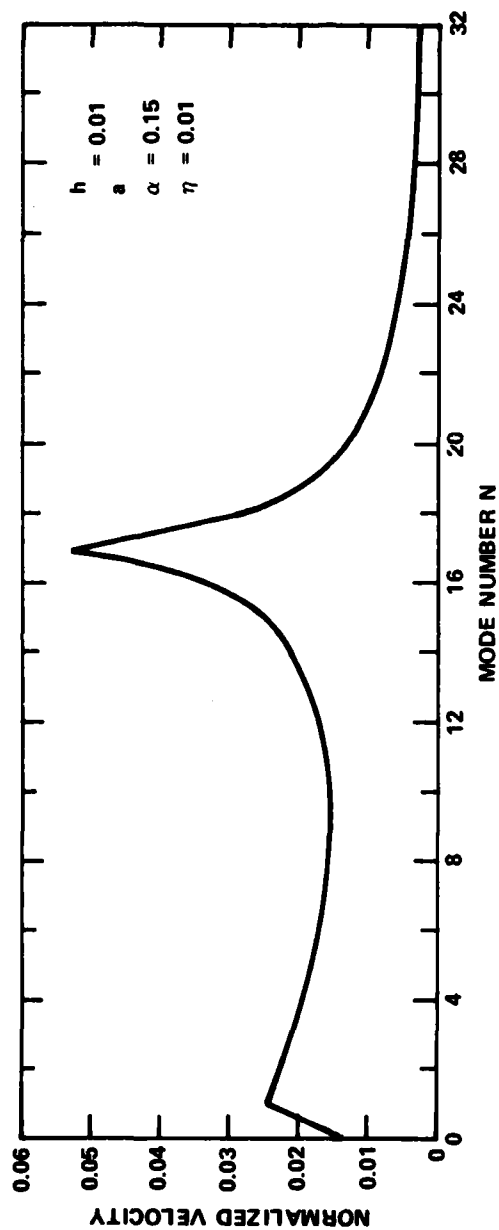


Figure 14 - Modal Response at the Drive Point for a Cylindrical Shell in Water Excited at the Ring Frequency

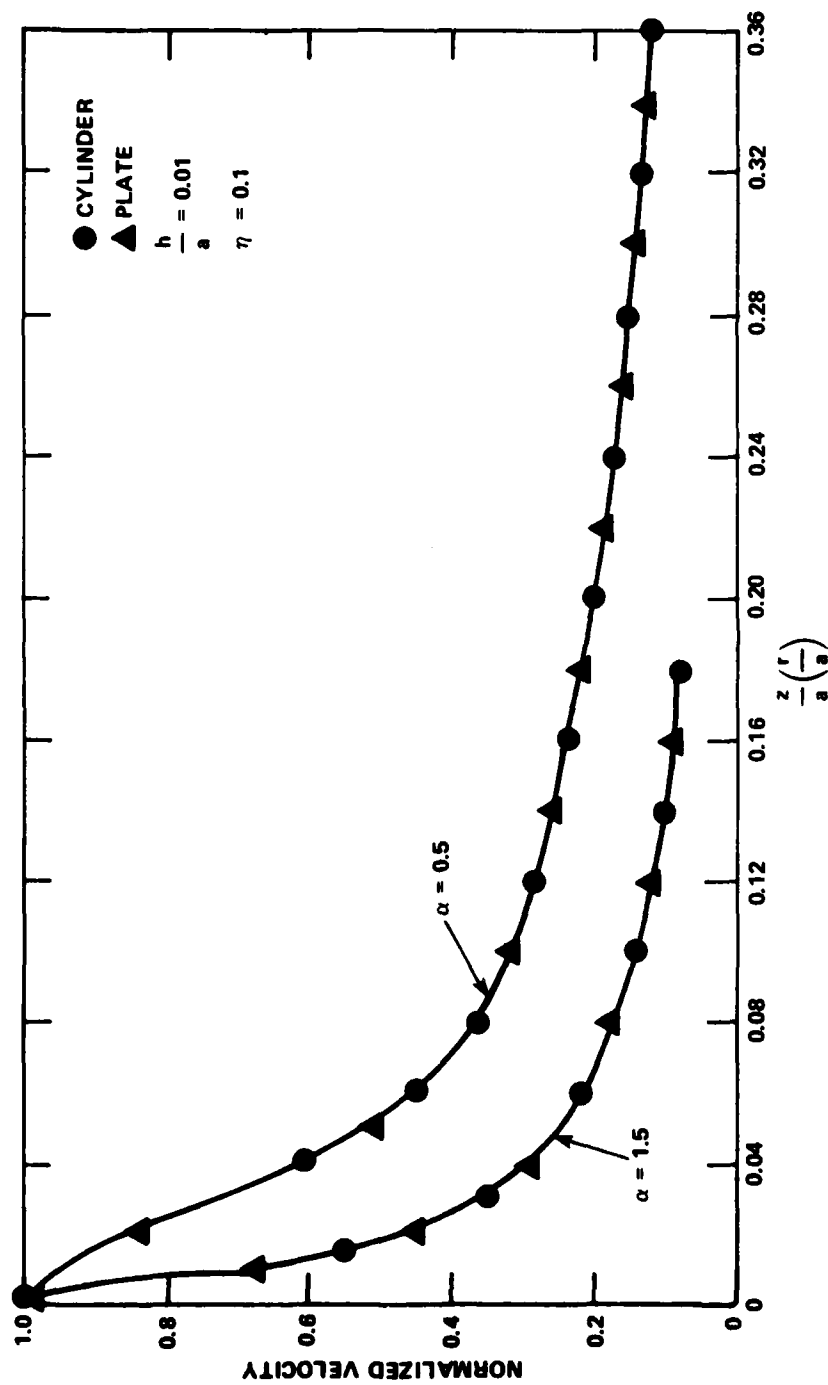


Figure 15 - Comparison of the Velocity Responses for a Cylinder and Plate in Vacuo, Point Excited at Frequencies of $\alpha=0.5$ and $\alpha=1.5$

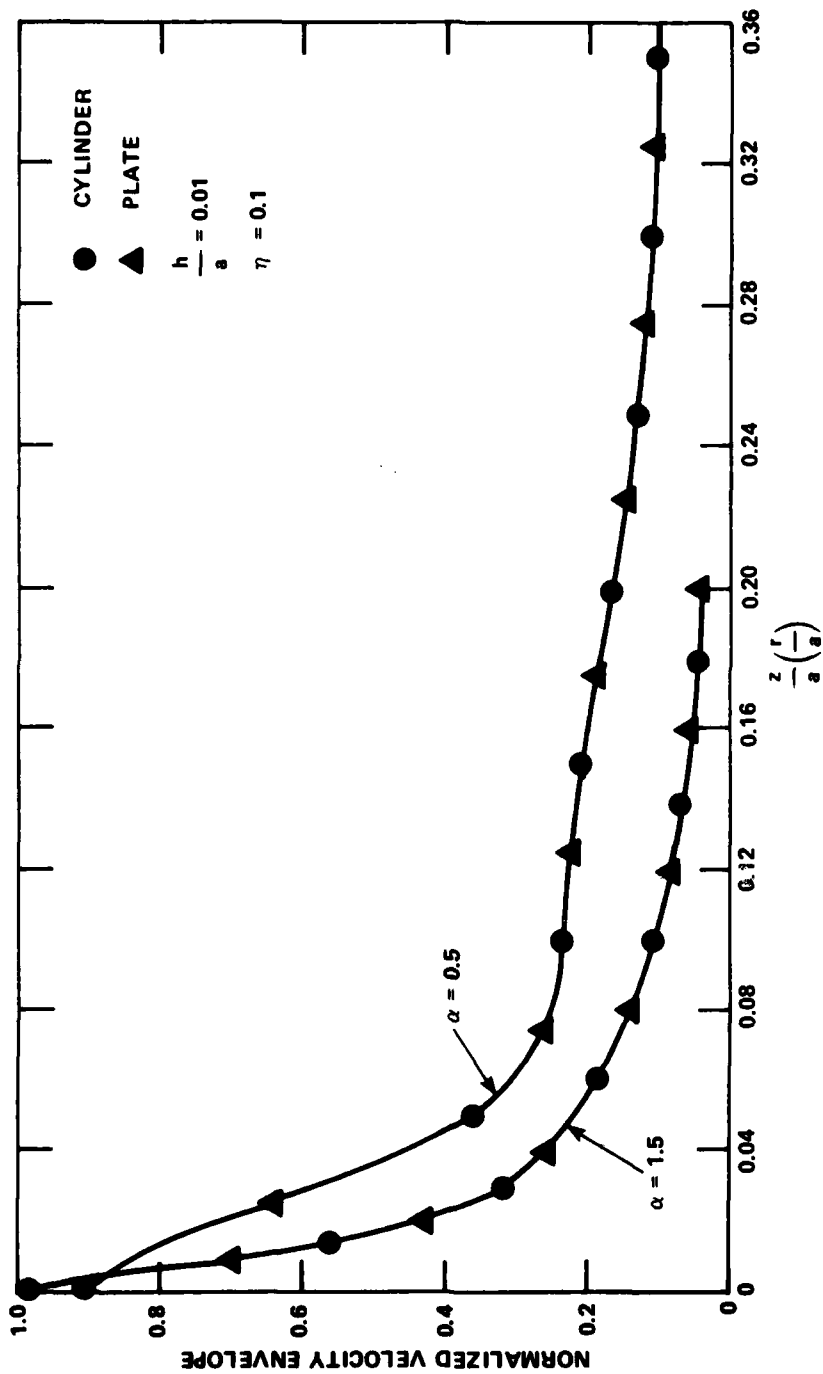


Figure 16 - Comparison of the Velocity Responses for a Cylinder and Plate in Water, Point Excited at Frequencies of $\alpha=0.5$ and $\alpha=1.5$

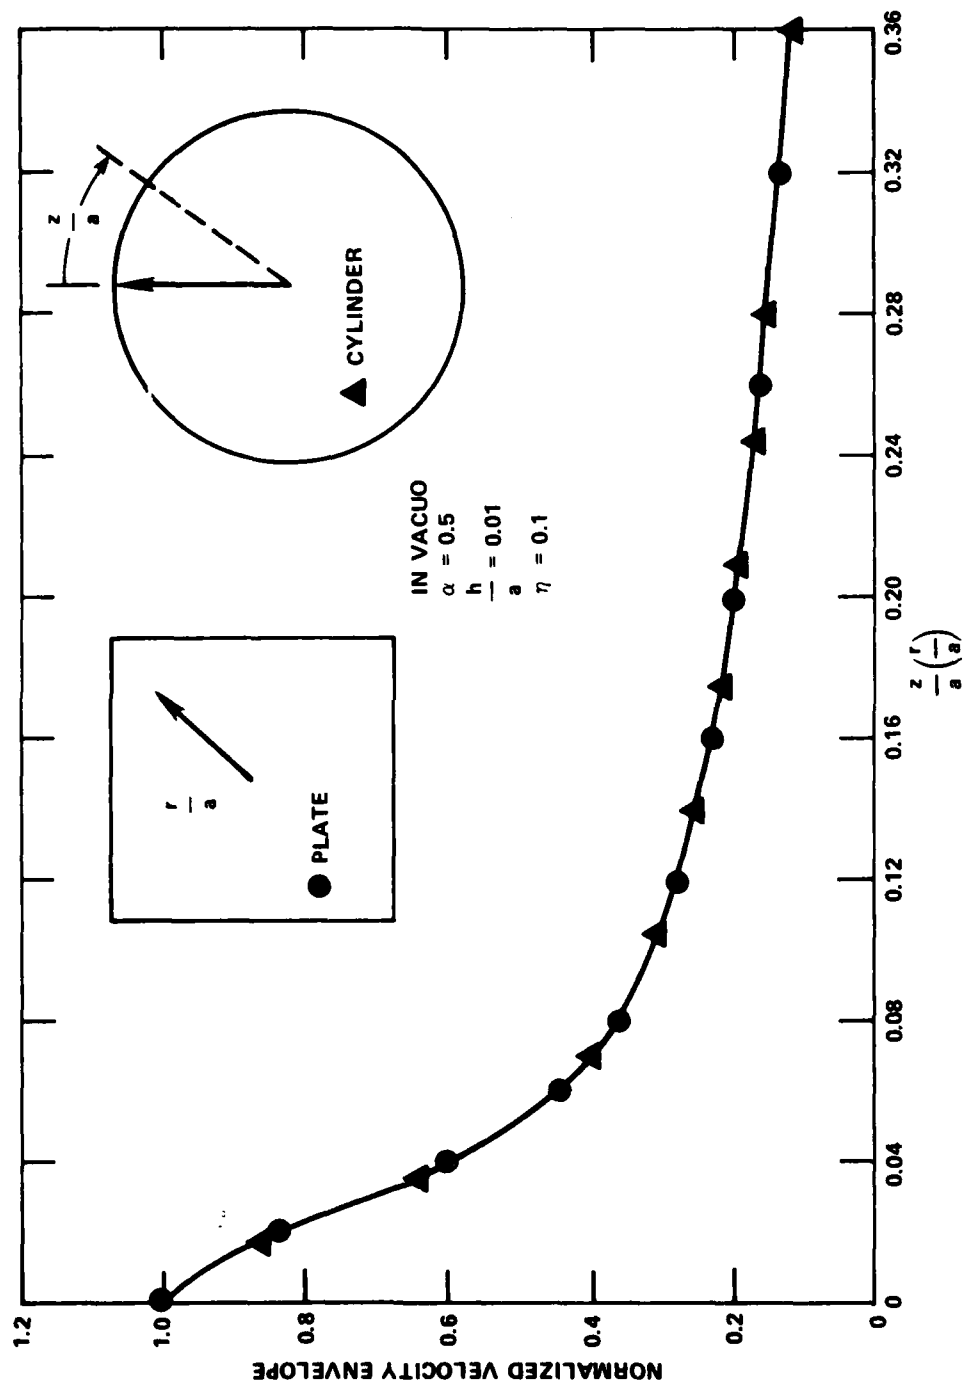


Figure 17 - Velocity Profile Along the Circumference of a Point Excited Cylinder Compared to the Velocity Profile for a Point Excited Plate

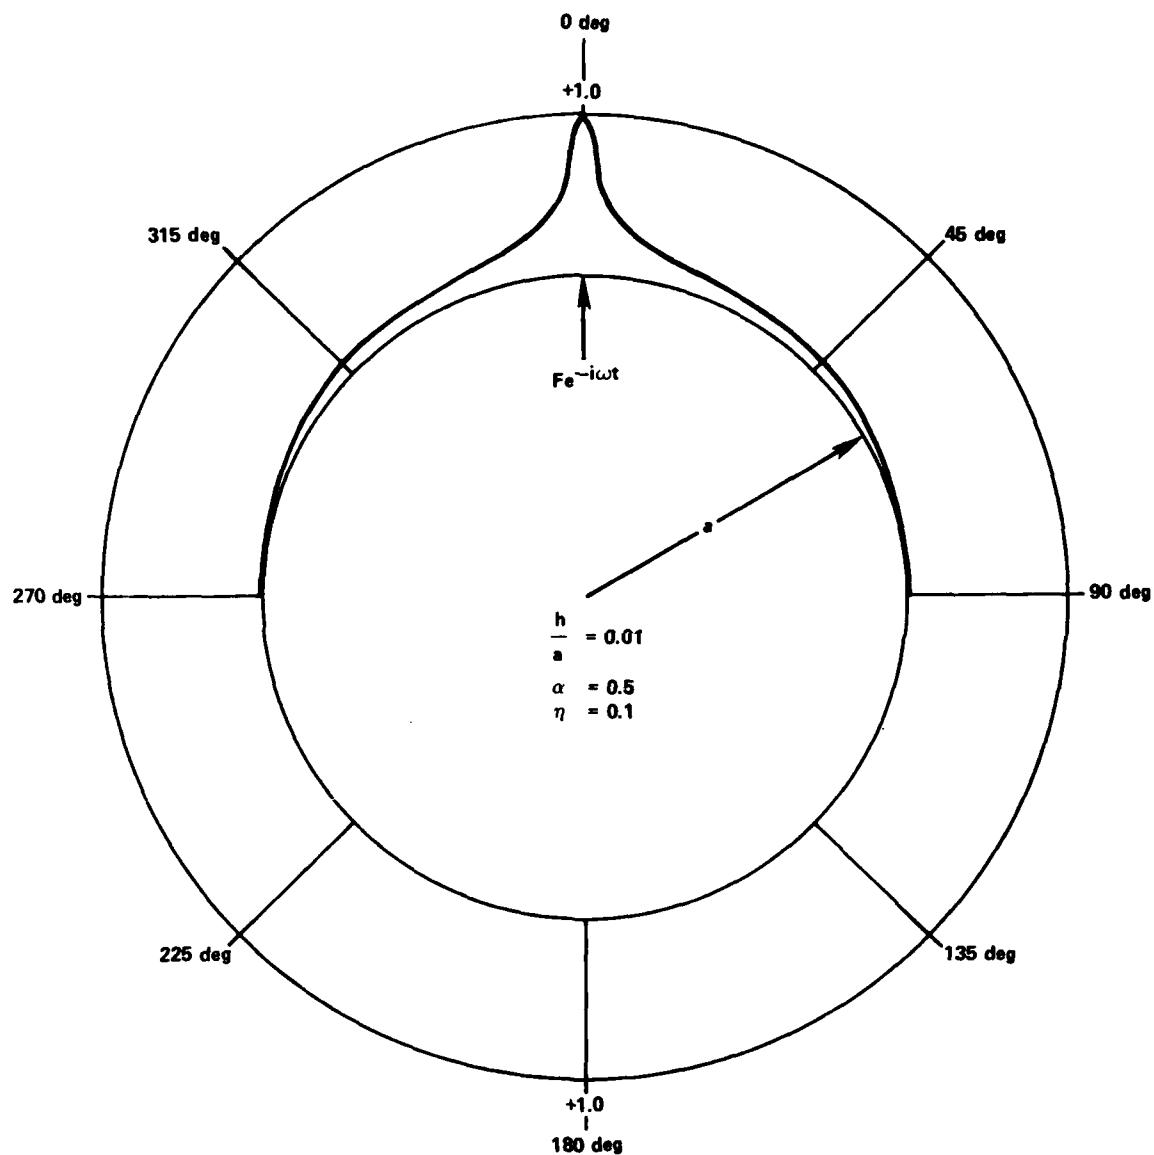


Figure 18 - Normalized Velocity Profile Along the Circumference of a Cylindrical Shell in Vacuo Point Driven at a Frequency of $\alpha=0.5$

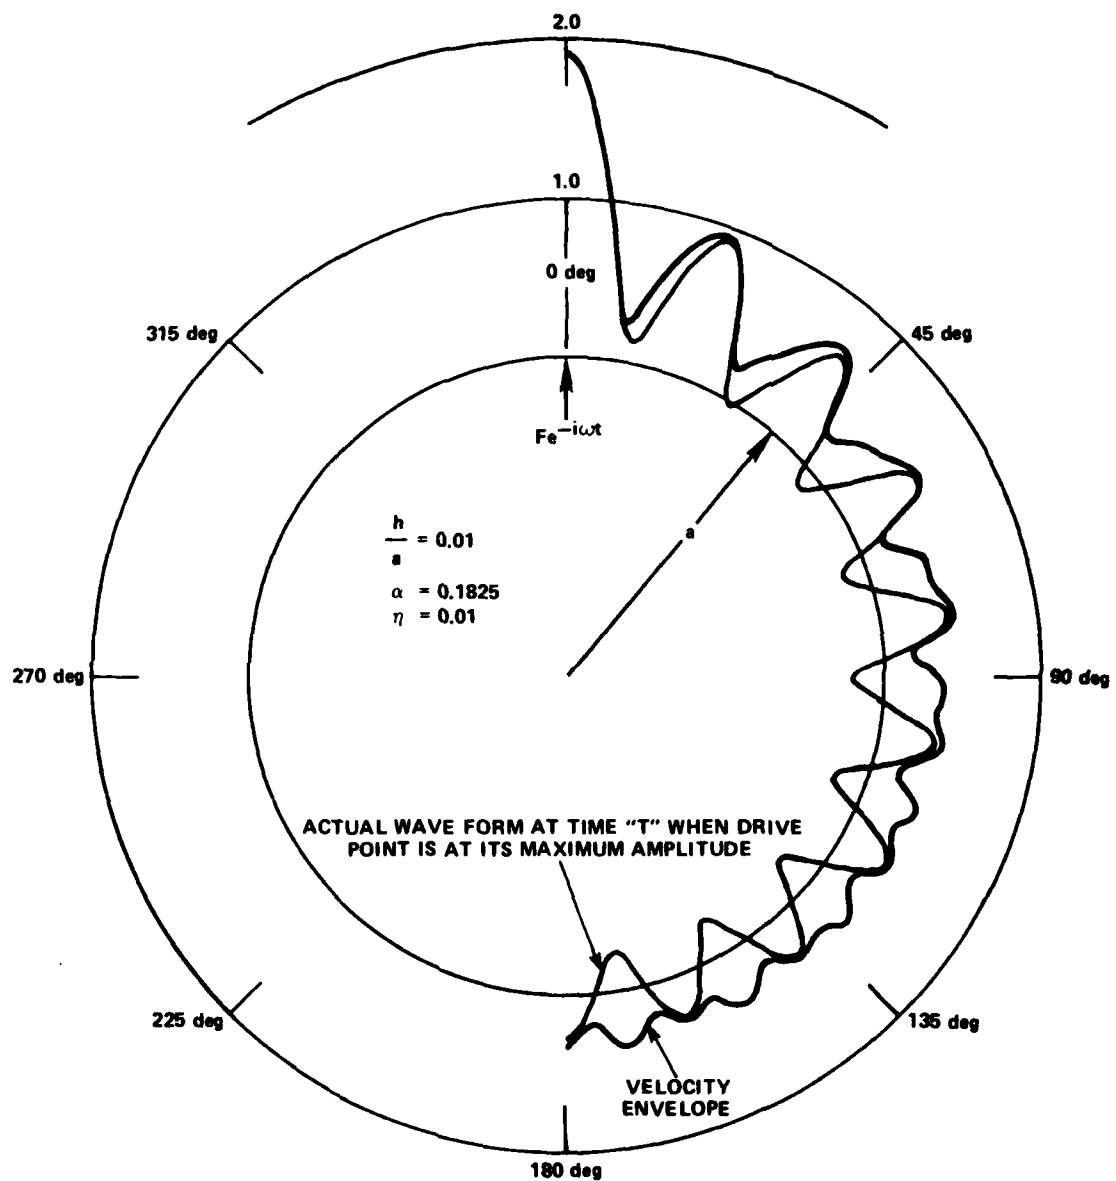


Figure 19 - Normalized Velocity Profile Along the Circumference of a Cylindrical Shell with a Structural Damping Value of 0.01 and Point Driven at the Ring Frequency in Vacuo

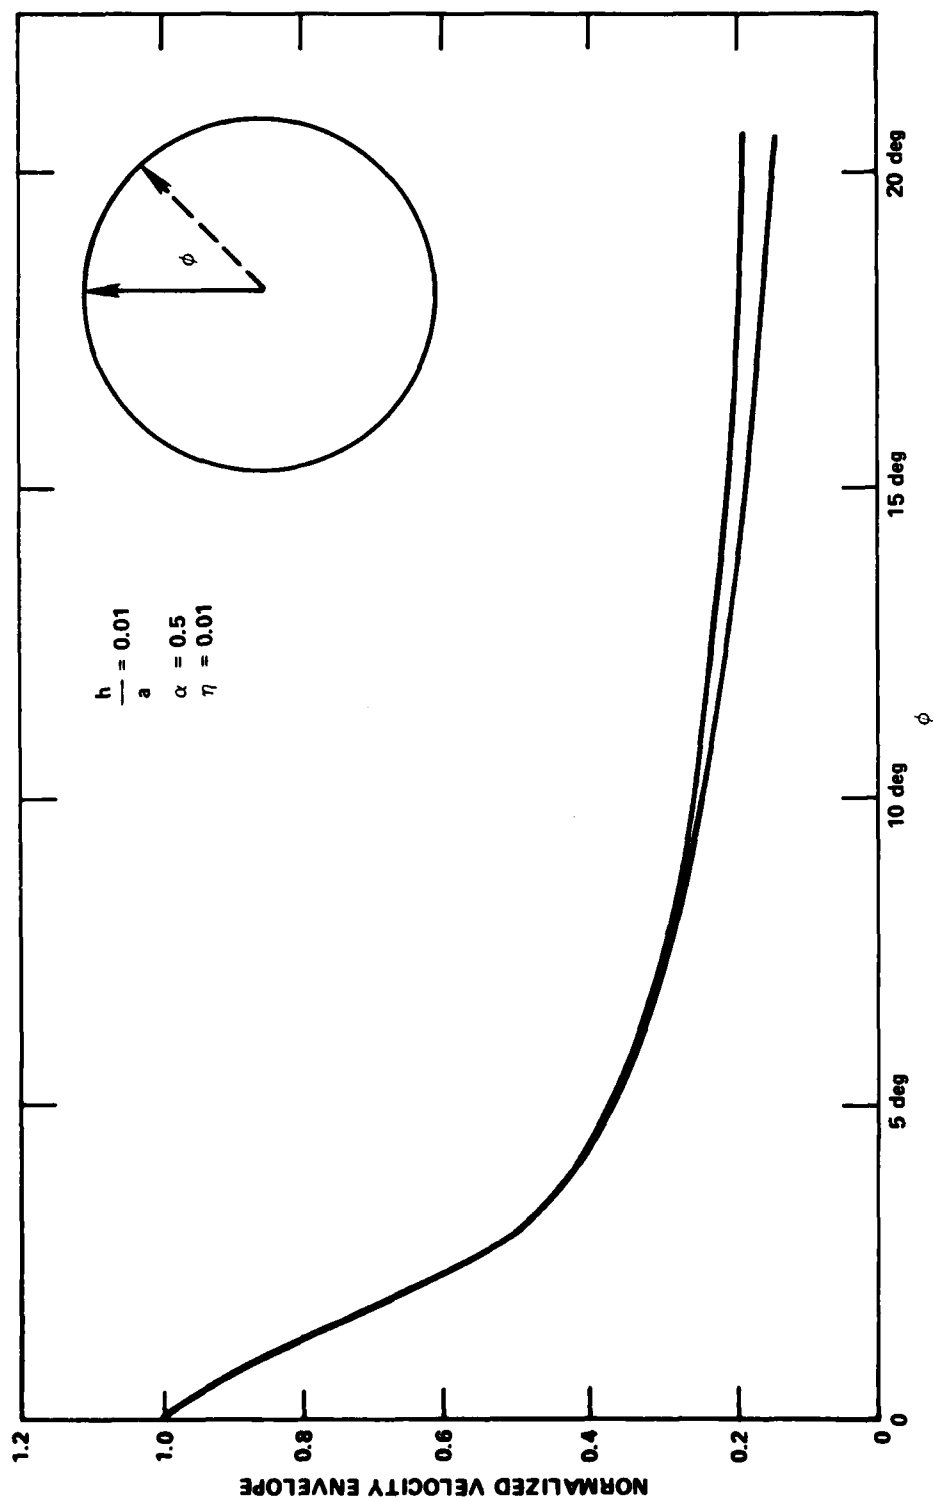


Figure 20 - Envelope of the Minima and Maxima Response of a Cylindrical Shell in Vacuo as a Function of the Circumferential Coordinate ϕ

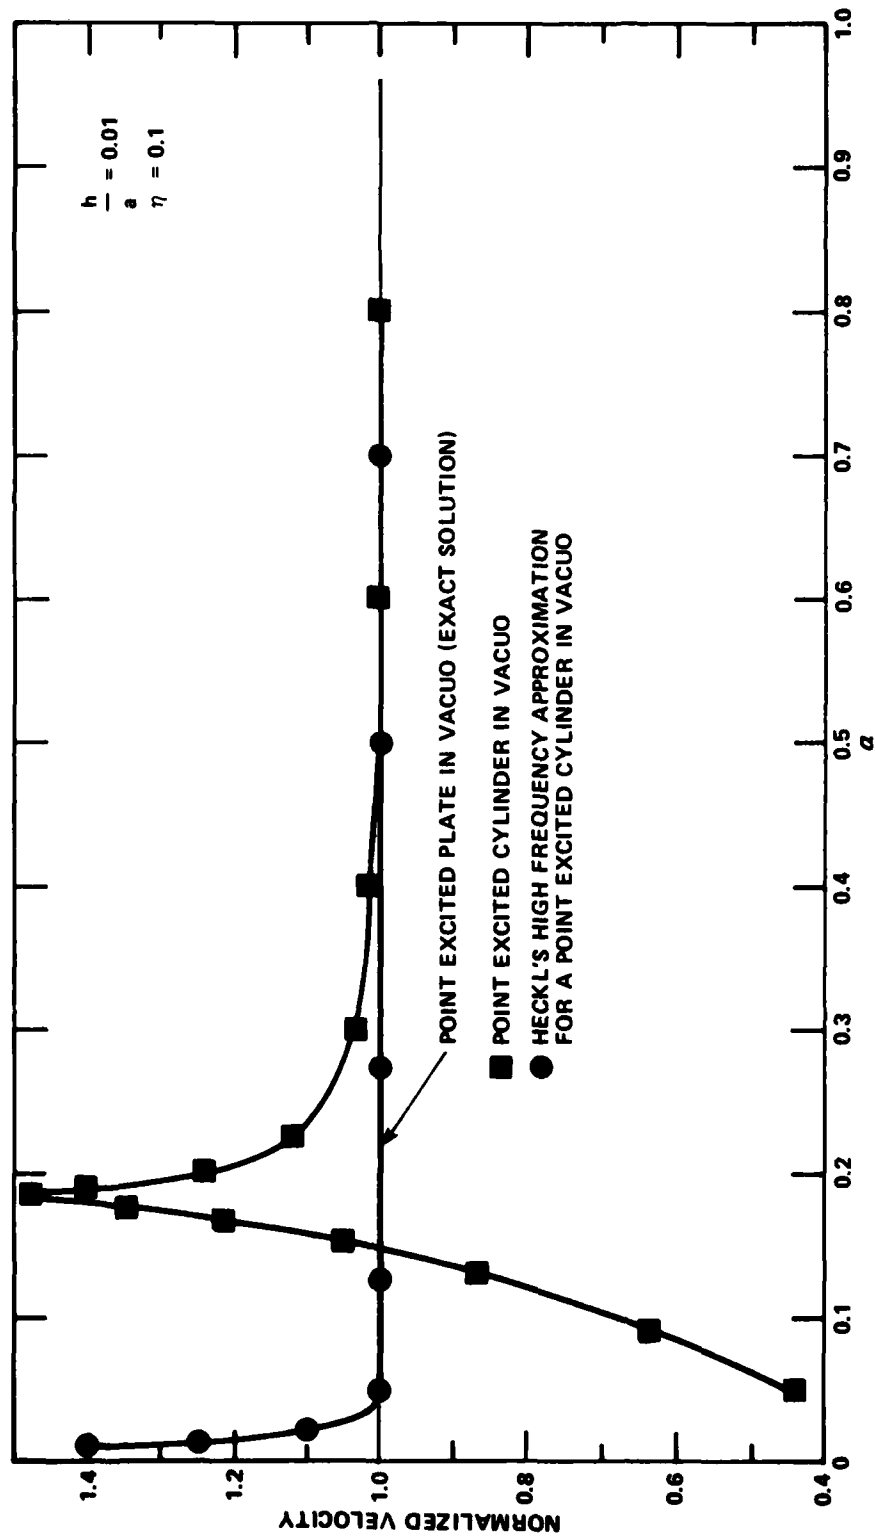


Figure 21 - Drive Point Velocity of a Cylindrical Shell and a Plate in Vacuo

REFERENCES

1. Junger, M. C., "Vibrations of Elastic Shells in a Fluid Medium and the Associated Radiation of Sound," *Journal of Applied Mechanics*, Trans. ASME, Vol. 19, pp. 439-445 (1952).
2. Bleich, H. H. and M. L. Baron, "Free and Forced Vibration of an Infinitely Long Cylindrical Shell in an Infinite Acoustic Medium," *Journal of Applied Mechanics*, Vol. 21, pp. 167-177 (1954).
3. Butler, Donald J., "Vibration of an Infinitely Long Cylindrical Shell in a Semi-Infinite Acoustic Medium," *Journal of Ship Research*, pp. 41-49 (Dec 1959).
4. Junger, M. C., "Dynamic Behavior of Reinforced Cylindrical Shells in a Vacuum and in a Fluid," *Journal of Applied Mechanics*, Vol. 21, pp. 35-41 (Mar 1954).
5. Junger, M. C. and D. Feit, "Sound, Structures, and Their Interaction," The MIT Press, Cambridge, Massachusetts (1972).
6. Warburton, G. B., "Vibration of a Cylindrical Shell in an Acoustic Medium," *Journal Mechanical Engineering Science*, Vol. 3, No. 1 (1961).
7. Heckl, Manfred, "Vibration of Point-Driven Cylindrical Shells," *Journal of the Acoustical Society of America*, Vol. 30, No. 10, pp. 1553-1557 (Oct 1962).

INITIAL DISTRIBUTION

Copies

CENTER DISTRIBUTION (Continued)

1	ONR 439	Copies	Code	Name
1	NRL/Washington	1	1926	K. Jones
1	NUSC/New London	1	194	J. Shen
2	NAVSEA	1	1940	R. Waterhouse
	2 SEA 05H	3	196	D. Feit
3	Penn State U/ARL	1	1962	R. Brown
	1 Hayek	1	1962	W. Fontaine
	1 Skudrzyk	1	1962	A. Kilcullen
	1 Stuart	1	1962	A. Zaloumis
1	Penn State U/Neubert	1	1965	H. Ali
1	Bolt Beranek & Newman/ Gorman	1	1965	J. Brooks
		1	1965	J. Caspar
1	Cambridge Acoust Assoc/ Garrellick	1	1965	F. Desiderati
		1	1965	J. Goodman
		1	1965	Y-N Liu
		1	1965	J. Niemiec
		1	1965	M. Rumerman
		1	1965	S. Solomon
12	DTIC	1	1965	A. Tucker
		20	1965	W. Vogel

CENTER DISTRIBUTION

Copies	Code	Name	Copies	Code	Name
			1	2740	Y. Wang
			10	5211.1	Reports Distribution
1	012		1	522.1	Unclass Lib (C)
1	1170	D. Jewell	1	522.2	Unclass Lib (A)
1	1730.5	M. Critchfield			
1	19	M. Sevik			
1	1900	T. Eisler			
1	1901	M. Strasberg			
1	1902	G. Maidanik			
1	1905.1	W. Blake			
1	1905.2	W. Reader			
1	1905.3	R. Cantrell			
1	1905.4	D. Vendettis			
1	192	R. Biancardi			